




CAN Series Products



RS-232/CAN Low speed Fault Tolerant Converter



I-7530-FT

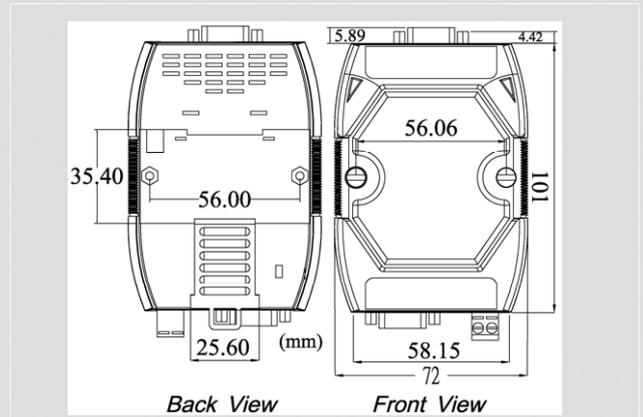

Dimensions

I-7530-FT is a RS-232/CAN low speed fault tolerant converter and can accurately convert messages between CAN and RS-232 communication media. It can resist more noise in harsh environment, and even access CAN messages with single line of CAN bus. In order to use the CAN network with traditional programmable RS-232 devices, we provide an easy way to achieve this purpose by several of user function call. It can be used in the application of CAN bus monitoring, building automation, remote data acquisition, environment control and monitoring, laboratory equipment & research, factory automation, etc.


Features

- Microprocessor inside with 20MHz
- Built-in CAN/RS-232 converter firmware
- Fully compatible with ISO 11898-3 standard
- Max transmission speed up to 125 kbps for CAN and 115.2 kbps for RS-232
- Support both CAN 2.0A and CAN 2.0B
- Built-in RS-232/CAN FIFO buffers
- Power, data flow and error indicator for CAN and RS-232
- Hardware watchdog design
- Full-duplex communication mode of RS-232 devices is not supported


- Serial COM command error response selection
- Utility tool for transmitting / receiving CAN messages

CAN Monitor & Data log Tools

- Show CAN messages by hex or decimal format
- CAN messages with timestamp
- Easy-to-use data logger for the diagnosis of the CAN networks and recording of the received data
- Send the predefined CAN messages manually or cyclically

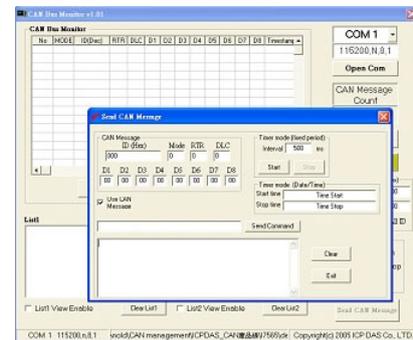


Utility Features

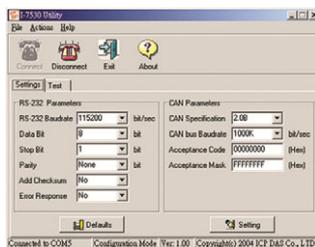

- CAN bus baud rate configuration
- CAN acceptance filter configuration
- CAN 2.0A or 2.0B specific selection
- Serial COM baud rate and data bit setting

Wire Assignments


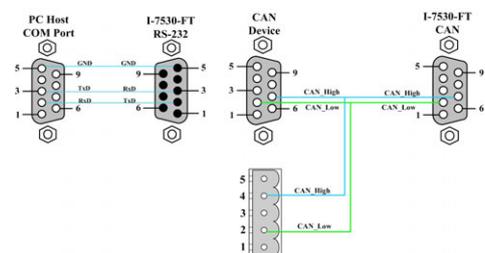




Hardware Specifications

| CAN Interface | |
|---------------------|---|
| Controller | Microprocessor inside with 20MHz |
| Transceiver | AMIS 41682 |
| Channel number | 1 |
| Connector | 9-pin male D-Sub (CAN_L, CAN_H, N/A for others) |
| Baud Rate (bps) | 10 k, 20 k, 50 k, 125 kbps |
| Terminator Resistor | 1 kΩ for CAN_H and CAN_L |
| Specification | ISO-11898-3, CAN 2.0A and CAN 2.0B |
| Receive Buffer | 1000 data frames |
| UART Interface | |
| COM | RS-232 |
| COM Connector | 9-pin female D-Sub (TxD, RxD, GND, N/A for others) |
| Baud Rate (bps) | 110, 150, 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bps |
| Data bit | 5, 6, 7, 8 |
| Stop bit | 1, 2 |
| Parity | None, Even, Odd |
| Receive Buffer | 900 data frames |
| LED | |
| Round LED | ON LED: Power and Data Flow; ERR LED: Error |
| Power | |
| Protection | Power reverse polarity protection, Over-voltage brown-out protection |
| Power Consumption | 1 W |
| Mechanism | |
| Installation | DIN-Rail |
| Dimensions | 72mm x 118mm x 33mm (W x L x H) |
| Environment | |
| Operating Temp. | -25 ~ 75 °C |
| Storage Temp. | -30 ~ 80 °C |
| Humidity | 10 ~ 90% RH, non-condensing |

Applications

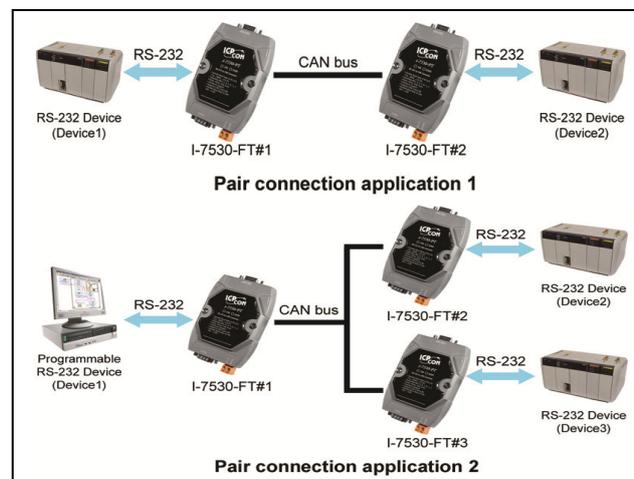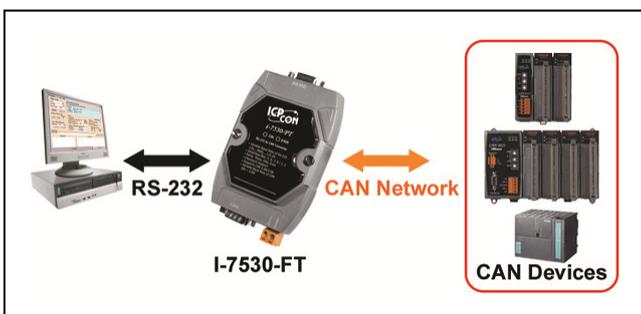

Ordering Information

| | |
|-----------------------|--|
| I-7530-FT-G | Intelligent RS-232/CAN low speed fault tolerant converter |
| I-7530-FT-G CR | Intelligent RS-232/CAN low speed fault tolerant converter (RoHS) |