




# CAN Series Products



## Intelligent RS-232/485/422 to CAN Converter



I-7530A

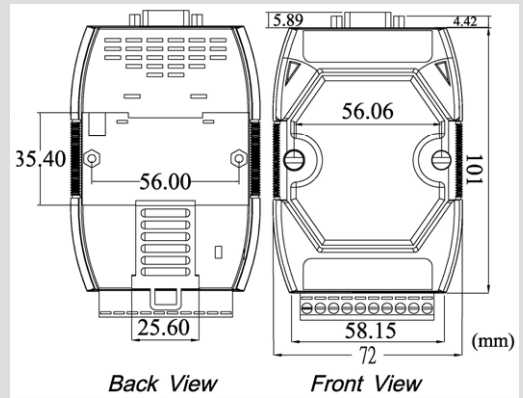

Dimensions

The I-7530A is designed to unleash the power of CAN bus via RS-232/485/422 communication method. It accurately converts messages between CAN and RS-232/485/422 networks. This module let you communicate with CAN devices easily from any PC or devices with RS-232/485/422 interface. The programmable RS-232/485/422 device (For example: PC, PLC or PAC) can use the serial port to connect to the CAN network via the I-7530A.


### Features

- Compatible with CAN specification 2.0A and 2.0B
- Fully compatible with ISO 11898-2 standard
- Support various baud rate from 10 kbps to 1 Mbps
- Jumper for 120 Ω terminator resistor
- Software configurable CAN and RS-232/RS-422/RS-485 communication parameters
- 1000 frames in CAN received buffer, 900 frames in RS-232/RS-422/RS-485 received buffer
- Watchdog inside
- Provide the transparent communication between the RS-232/RS-485/RS-422 devices via CAN bus
- Enable different RS-232/RS-485/RS-422 devices into an individual group in CAN bus network (Full-duplex communication mode of RS-232/RS-422 devices is not supported)


- CAN 2.0A or 2.0B specific selection
- Serial COM baud rate and data bit setting
- Serial COM command error response selection
- Utility tool for transmitting / receiving CAN messages

### CAN Monitor & Data log Tools

- Show CAN messages by hex or decimal format
- CAN messages with timestamp
- Easy-to-use data logger for the diagnosis of the CAN networks and recording of the received data
- Send the predefined CAN messages manually or cyclically




### Utility Features



- CAN bus baud rate configuration
- CAN acceptance filter configuration

### Block Diagram

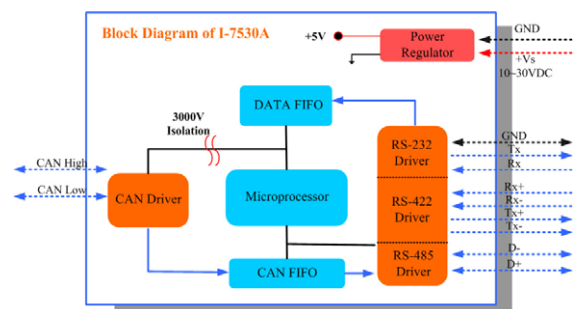


## Hardware Specifications

| CAN Interface       |   |
|---------------------|---|
| Controller          | Microprocessor inside with 20MHz  |
| Transceiver         | NXP 82C250  |
| Connector           | 9-pin male D-Sub (CAN L, CAN H, N/A for others)   |
| Port Channels       | 1   |
| Baud Rate           | 10 k, 20 k, 50 k, 100 k, 125 k, 250 k, 500 k, 800 k and 1 Mbps  |
| Protection          | 3000 V <sub>DC</sub> power protection on CAN side, 2500Vrms photo-couple isolation on CAN bus                     |
| Terminator Resistor | Selectable 120 Ω terminator resistor by jumper  |
| Support Protocol    | CAN 2.0A/2.0B   |
| Receive Buffer      | 1000 data frames  |
| UART Interface      |   |
| COM                 | RS-232、RS-485、RS-422  |
| Connector           | 14-pin terminal connector<br>RS-232 : TxD, RxD, GND<br>RS-422 : Tx+, Tx-, Rx+, Rx-<br>RS-485 : D+, D-             |
| Baud Rate           | 110, 150, 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bps                                       |
| Data Bits           | 5, 6, 7, 8  |
| Stop Bits           | 1, 2  |
| Parity              | None, Even, Odd   |
| Receive Buffer      | 900 data frames   |
| Power               |   |
| Power Consumption   | 1W  |
| Power Requirement   | Unregulated +10V <sub>DC</sub> ~ +30V <sub>DC</sub> . Power reverse protection, Over-Voltage brown-out protection |
| LED                 |   |
| Round LED           | ON LED: Power and Data Flow; ERR LED: Error   |
| Mechanism           |   |
| Installation        | DIN-Rail  |
| Dimensions          | 72mm x 118mm x 33mm (W x L x H)   |
| Environment         |   |
| Operating Temp.     | -25°C to 75°C   |
| Storage Temp.       | -30°C to 80°C   |
| Humidity            | 10~90% non-condensing   |

## Pin Assignments



### Pin Assignment

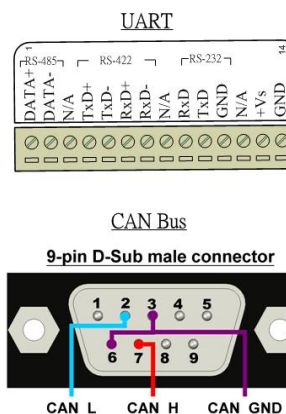

## Ordering Information

**I-7530A-G CR**

Intelligent RS-232/RS-485/RS-422 to CAN converter (RoHS)