

# NS-200FT

## Industrial 10/100 Base-T to 100 Base-FT Fiber Optical Converter



### **Introduction:**

The NS-200FT is an Ethernet (10/100Base-TX) to Fiber Optic (100Base-FX) converter. The Ethernet supports 10/100M auto-negotiation feature and auto MDI/MDIX function.

The NS-200FT operates at either half or full duplex mode. In full duplex mode, range is 2km with 62.5/ 125 $\mu$ m fiber cables; in half duplex mode, range is 412m with 62.5/ 125 $\mu$ m fiber cables.

It contains "soft start" function with overload protection, high-low voltage protection. The width of the NS-200FT is just 32.30 mm, so it can be used where space is important.

### **Features:**

- Automatic MDI / MDI-X crossover for plug-and-play
- Each port supports both 10/100 Mbps speed auto negotiation
- Store-and-forward architecture
- Full duplex IEEE 802.3x and half duplex backpressure flow control
- Supports +10 ~ +30V DC voltage
- Supports operating temperatures from 0 °C ~ +70 °C
- DIN rail mount for industrial usage


### **Specifications:**

- Compatibility: IEEE 802.3, IEEE802.3u, And IEEE802.3x
- Interface: 10/100 Base-T and 100 Base-FT
- Ethernet Port: 10/100 Mbps x 1)
- Provides LEDs for network and power monitoring
- ESD Protection:
  - 8KV Contact Discharge
  - 15KV Air-Gap Discharge
- Fiber Optic Transmission distance:
  - Multi mode fiber: 50/125, 62.5/125 or 100/140  $\mu$ m
  - , 412 m for half duplex, 2 km for Full duplex
- Ethernet Cables:
  - 10 Base-T (Cat.3, 4, 5 UTP cable; 100m Max.)
  - 100 Base-T (Cat.5 UTP cable; 100m Max.)
- Environment:
  - Operating temperature: 0 °C ~ +70 °C
  - Storage Temperature: -20 ~ +85 °C
  - Relative Humidity: 10% to 90% non-condensing
- Dimensions: 32.30 x 99.00 x 77.50 mm (W x H x D)
- Power requirements: 10 to 30V DC (Removable Terminal Block)
- Power consumption: 0.12A@24Vdc (+/- 5%, arrowed)

**LED functions:**

Standard RJ45 female connectors are provided. A standard RJ45 plug cable is necessary to connect your device to the unit since switch that supports auto crossover. Figure1 shows the LED indicator functions. The module includes an internal.


**Figure1:**

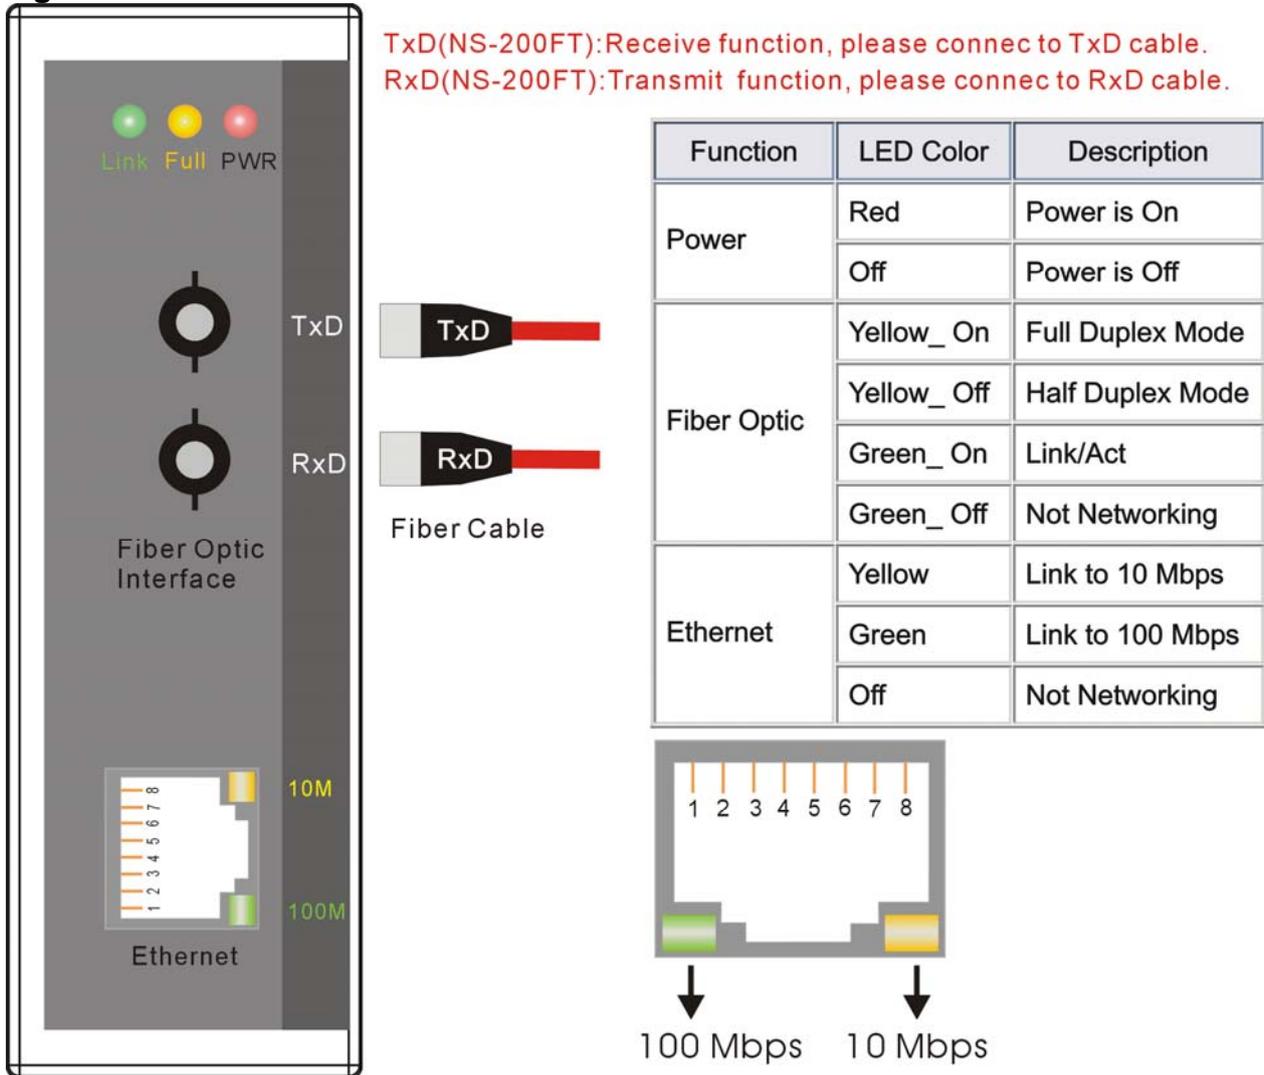

**Application Note:**

Figure2 shows common media conversion system network topologies. This figure is a simple end-to-end configuration; it is easy way to verify proper operation of the media converter(s), assuming that the Network Interface Cards (NIC's) or Ethernet ports in each PC/workstation end link partner are properly configured.


**Figure2:**

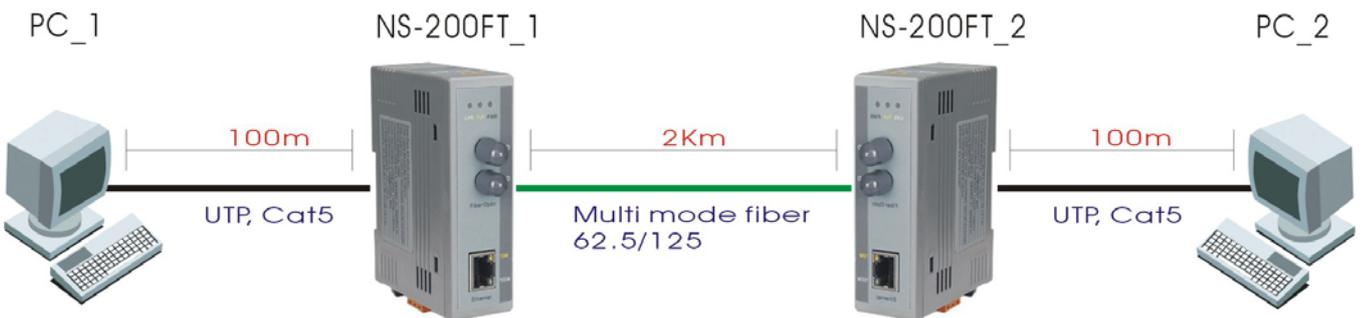

**Checking Power:**

Since the NS-200FT consumes 2.9W Max, ensure that your power supply is able to meet this demand. The Input voltage range is between +10 and +30VDC.

External power supply is connected using the removable terminal block as shown below:

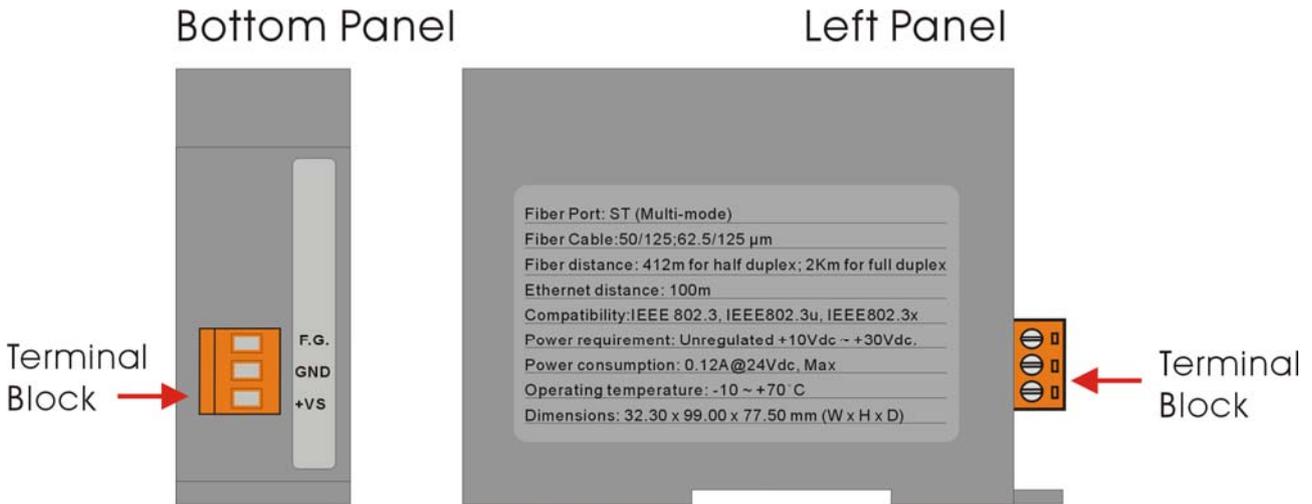

**Pin Function For Terminal Block:**

External power supply is connected using the removable terminal block:

**+Vs** : Power input +10 to +30V

**GND** : Ground

**F.G** : F.G. stands for Frame Ground (protective ground). It is optional. If you use this pin, it can reduce EMI radiation; improve EMI performance and ESD protection.


**Full / Half-Duplex Selection:**

There are two modes of data transmissions, full-duplex and half-duplex transmission. The data can be transmitted in both directions on a single carrier at the same time when you select Full-duplex mode. But the data can only be transmitted in one direction on a single carrier at the same time when you select Half-duplex mode. You may select Full or half-duplex mode according to your equipment requirement.

You can configure full or half-duplex NS-200FT via DIP –Switch. (Default: full-duplex).

| DIP-Switch | Description  |
|------------|--|
|            | <p><b>Full-duplex ( Default)</b></p> <p>Transmission Distance: 2km</p> |
|            | <p><b>Half-duplex</b></p> <p>Transmission Distance: 412m</p>           |

**Block Diagram:**

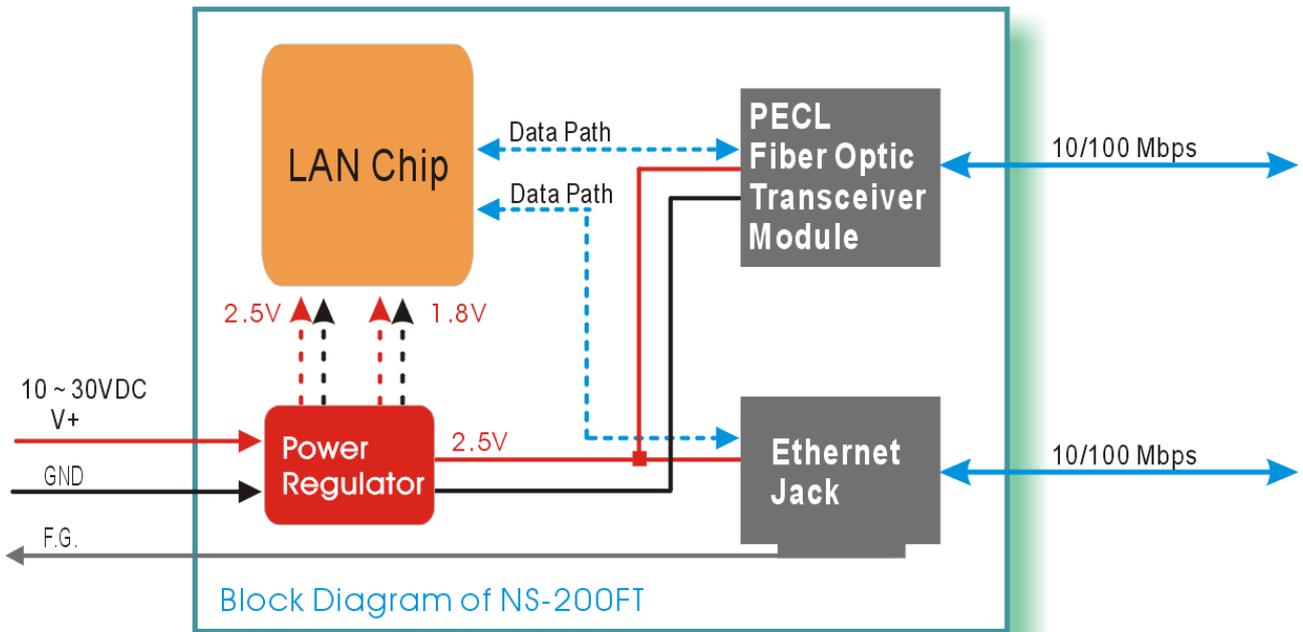

**Dimensions:**

The width of the NS-200FT is just 32.30 mm, so it can be used where space is important.

Profile Panel

Front Panel

