



RACK-500AI-C246

NEW



Feature

- Intel® Coffee Lake C246 chipset with Xeon® CPU
- 1 x Front-accessible 3.5" and 1 x 3.5" HDD drive capacity
- Integrated one PCIe x16 and one x4 Gen3 expansion slot
- Great flexibility hardware expansion



intel

Specifications

Model Name		RACK-500AI-C246
Chassis	Color	Navy blue and black
	Dimensions (WxDxH)	440.2 mm x 110.6 mm x 221.3 mm
	System Fan	System fan & CPU fan
	Chassis Construction	Heavy duty metal
Motherboard	CPU	Intel® Xeon® E-2176G CPU (3.70 GHz, 6-core, TDP 80W)
	Chipset	Intel® C246
	System Memory	Four 288-pin 2666MHz dual-channel DDR4 SDRAM unbuffered DIMMs support up to 64GB ECC & non-ECC (2 x 8GB pre-installed)
	Display Output	Dual display supported 1 x HDMI (up to 4096 x 2304@30Hz) 1 x Internal DisplayPort (up to 4096 x 2304@60Hz)
Storage	Hard Drive	1 x Removable 3.5" SATA 6Gb/s drive bay (hot-swappable)
	M.2	1 x 2280 M key (PCIe x4)
I/O interfaces	Ethernet	LAN1: Intel® I219LM PHY LAN2: Intel® I211-AT PCIe controller (co-lay I210-AT)
	USB 3.2	2 x Internal USB 3.2 Gen1 (2x10 pin)
	USB 2.0	6 (pin header)
	RS-232	3 (pin header)
	RS-422/485	1 (1x4 pin, p=2.0)
	Expansion	1 x PCIe Gen3 x16 slot 1 x PCIe Gen3 x4 slot *To install dual-slot PCIe add-on cards (max. length 338mm), the CPU cooler must be changed (P/N: 19100-000238-00-RS).
Power	Power Input	ATX power (350W)
	PCIe Expansion Card (GPU/Add-on Cards) Recommendation	Total maximum up to 150W (80W CPU with 16GB memory, 350W ATX power) Total maximum up to 180W (35W CPU with 16GB memory, 350W ATX power)
Reliability	Mounting	Rack mount
	Operating Temperature	-20°C~+50°C
	Storage Temperature	-30°C~+60°C
	Relative Humidity	10% ~ 95%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operation Vibration	MIL-STD-810G 514.6C-1
	Weight (Net/Gross)	8 kg/11 kg
	Safety/EMC	CE/FCC
OS	Supported OS	Microsoft Windows 10 / Windows 11, Linux


Ordering Information

Part No.	Description
RACK-500AI-C246-XE/16G/35-R10	5U AI System with Intel® Xeon® E-2176G CPU (3.70 GHz, 6-core, TDP 80W) with Intel® C246, pre-installed 16GB ECC DDR4 memory, HDMI, Dual Intel® PCIe GbE, USB 3.2, iAMT, w/ 1 PCIe x16/x4 Slot BP, w/ FSP350(350W), RoHS
RACK-500AI-C246-35-R10	5U AI System with Intel® C246, HDMI, Dual Intel® PCIe GbE, USB 3.2, iAMT, w/ 1 PCIe x16/x4 Slot BP, w/ FSP350, RoHS

Options

Part No.	Description
GPOE-2P-R20	PCI Express Power over Ethernet card, 2-port 1000 Base(T), 802.3at compliant, low profile, RoHS
GPOE-4P-R20	PCI Express Power over Ethernet card, 4-port 1000 Base(T), 802.3at/af compliant, low profile, RoHS
IPCIE-4POE-R10	PCI Express Power over ethernet card, 4-port 1000 Base(T), 802.3af compliant, RoHS
Mustang-V100-MX4-R10	Computing Accelerator Card with 4 x Intel® Movidius™ Myriad™ X MA2485 VPU, PCIe Gen2 x2 interface, RoHS
Mustang-V100-MX8-R11	Computing Accelerator Card with 8 x Movidius Myriad X MA2485 VPU, PCIe gen2 x4 interface, RoHS
Mustang-F100-A10-R10	PCIe FPGA Highest Performance Accelerator Card with Arria 10 1150GX support DDR4 2400Hz 8GB, PCIe Gen3 x8 interface
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
AC-KIT-892HD-R10	7.1 channel HD Audio kit with Realtek ALC892 support dual audio streams
SAIDE-KIT01-R10	SATA to IDE/CF converter board
32102-000100-200-RS	SATA power cable, 150mm; (A) MOLEX 8981-4M p=5.08; (B) two SATA 15P 180°; RoHS
32102-044900-100-RS	PCIe power cable, 100mm; (A) two MOLEX 8981-04M p=5.08; (B) TKP:H6657R1-06-B-03 p=4.2; RoHS
32102-011500-100-RS	CPU cooler kit, 105 x 67 x 12.1 mm; fan: 77 x 75 x 15.4 mm; 12V, 4P, 5500RPM; RoHS
19100-000238-00-RS	Power cable, 150mm; (A) two MOLEX 8981-04P p=5.08; (B) MOLEX 8981-04M p=5.08; RoHS
CA-950GB-R10	19" Rackmount Carrier for Rack-500G/RACK-900G/RACK-500AI

Fully Integrated I/O

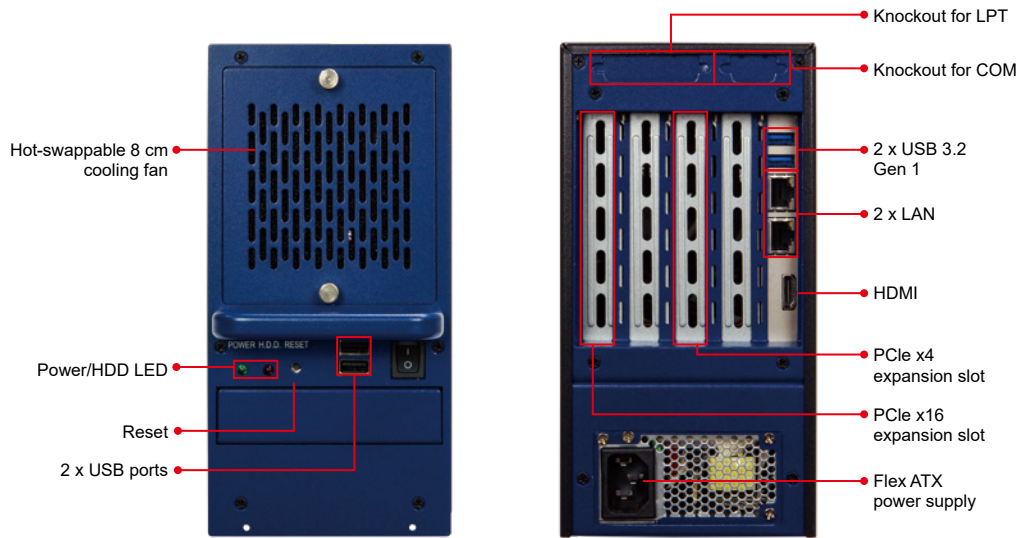

FDD and HDD are not included in package




CA-950GB-R10



CA-950GB-R10


19" rack carrier can carry four RACK-500AI and fit into standard 19" width rack with 5U height.

RACK-500AI-C246 Dimensions (Unit: mm)

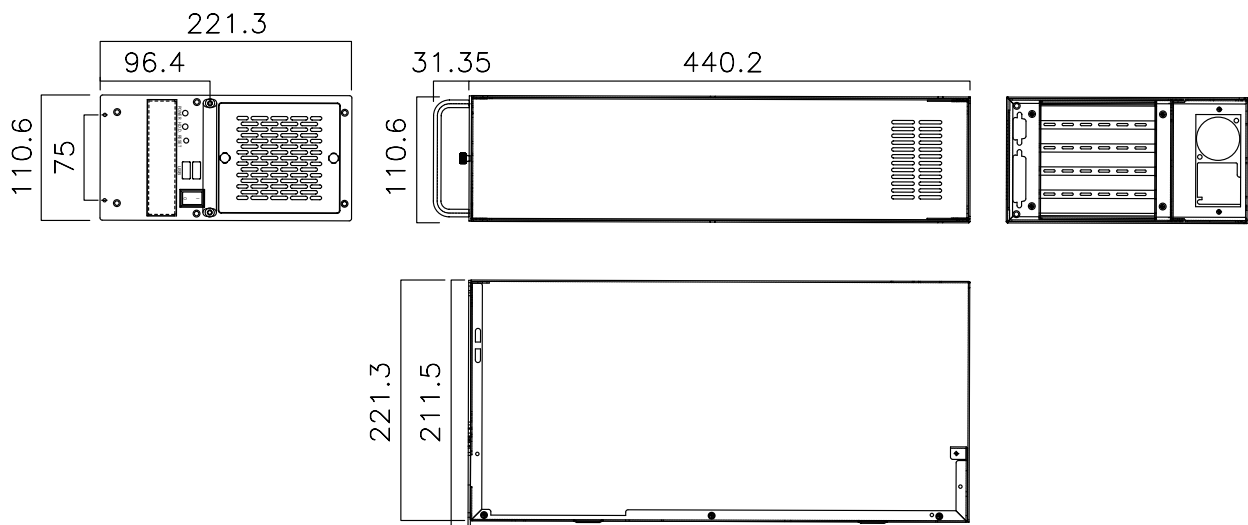


Single board computer in RACK-500AI (SPCIE-C246)

Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Xeon® E3, Core™ i9/i7/i5/i3/Pentium®/Celeron® CPU per Intel® C246, ECC & non-ECC DDR4, HDMI, DP, Dual Intel® PCIe GbE, USB 3.2, SATA 6Gb/s, M.2, HD Audio, iAMT and RoHS.

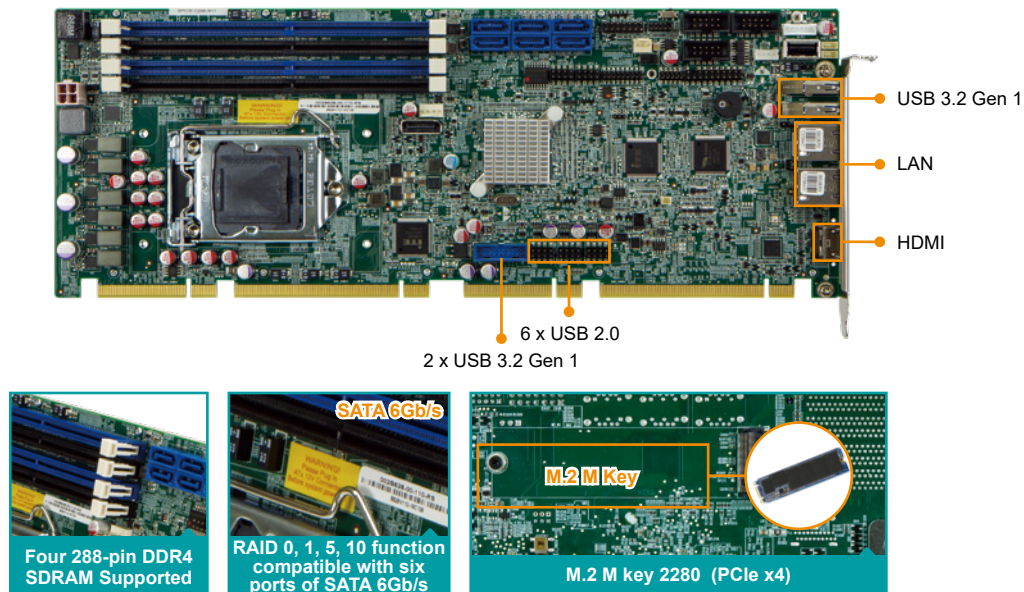

PCI Express Backplane in RACK-500AI (PE-3S1)

5-slot PICMG 1.3 backplane with one PCIe x16 slot and one PCIe x4 slot, RoHS

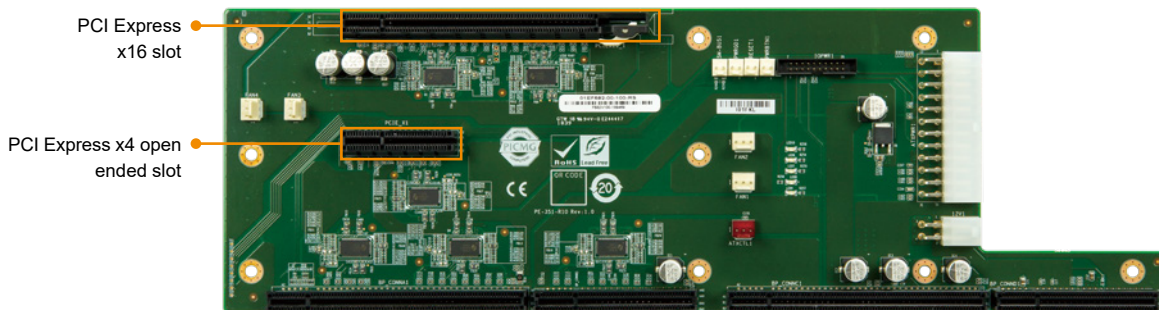

PE-3S1
Dimensions (Unit: mm)

