

# TXIOB-XM81-A


## Expansion IO Board Module

### Features


- Support Full-Size PCIe Mini
- Support M.2 A Key 2230
- Support M.2 B Key 3042/52/80 with SIM Slot

### Specifications

- External Connector:
  - 1 x Full-Size Mini PCIe (PCIe x1 & USB2.0) with SIM Slot
  - 1 x M.2 A Key 2230 (PCIe x1 & USB2.0)
  - 1 x M.2 B Key (M.2\_B1) 3042/52/80 (PCIe x1 & USB3.2<sup>1</sup>) with SIM Slot
  - 1 x M.2 B Key (M.2\_B2) 3042/52/80 (PCIe x2<sup>2</sup>) with SIM Slot
- Operating Temperature: 0°C ~ 60°C
- Operating Humidity: 5% ~ 95%, non-condensing
- Dimensions (LxW): 131.22 mm x 170.94 mm
- CE/FCC compliant

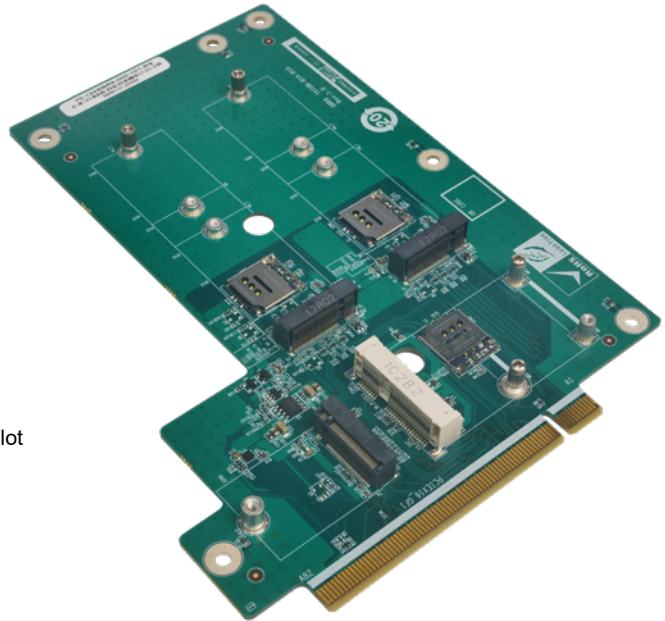

### Dimensions (Unit: mm)

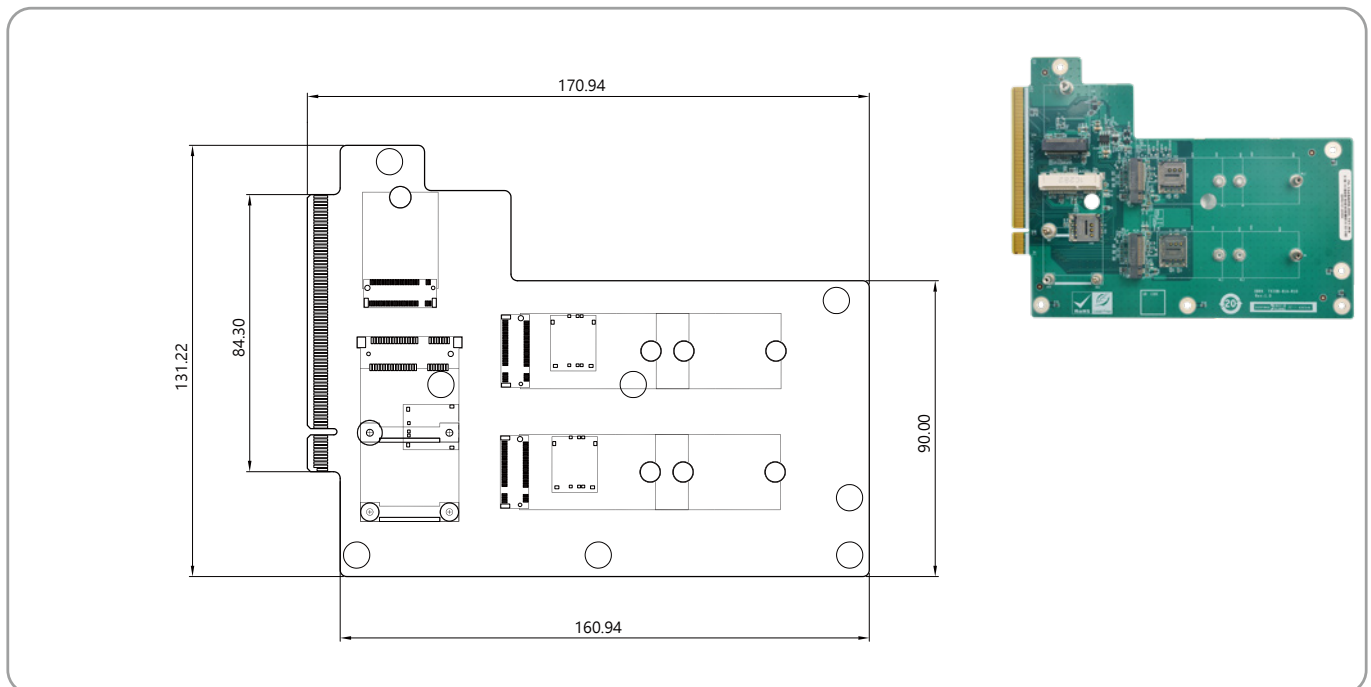

### Ordering Information

Model	Description
TXIOB-XM81-A-R10	TANK-XM81 series expansion IO board module, 2 x M.2 B Key, 1 x M.2 A Key, 1 x PCIe Mini

Note: 1. The USB 3.2 signal of the M.2\_B1 connector is not supported in the TANK-XM810.

2. The default signal of the M.2\_B2 connector is PCIe x1. To configure as PCIe x2, please consult with IEI.

### Packing List

1 x Screw pack