

36 KEY "COMMANDER" KEYBOARD



KSTC36

These units are built around 36 short travel, tactile feel switches (numeric, function and control keys) and a compact 25mm trackball. The condensed but well defined key layout combined with the use of a compact trackball enables a fast and comfortable access to the most important machine commands and an accurate control of the cursor.

The front panel mount version can be built in using the eight M3 studs, a silicone sponge seal ensures a watertight construction. The enclosed version has a robust ABS housing.

SPECIFICATIONS

- Sealing : IP65 sealed
- Keys : 36 tactile membrane keys with 2.55 N operating force
- Pointing Device : 25 mm trackball
- Output : 1,6 m. PS/2 or USB cable(s)
- Dimensions panel mount : 182 x 135 x 25 mm
- Dimensions enclosed : 212 x 165 x 27 mm
- Weight : 0,3 kg / 0,7 kg

CONNECTIVITY

The PS/2 keyboards are supplied with two 1,6 m long shielded straight cable ended with 6 pin mini DIN plugs. The USB versions are supplied with one 1,6m long shielded straight cable ended by a USB type A connector.

** Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.*


ORDER INFO

LAYOUT	PANEL MOUNT	ENCLOSED
n.a.	KSTC36 F1 xxx	KSTC36 S1 xxx

xxx = protocol output : PS/2 or USB

36 KEY "COMMANDER" KEYBOARD

DIMENSIONAL DRAWING

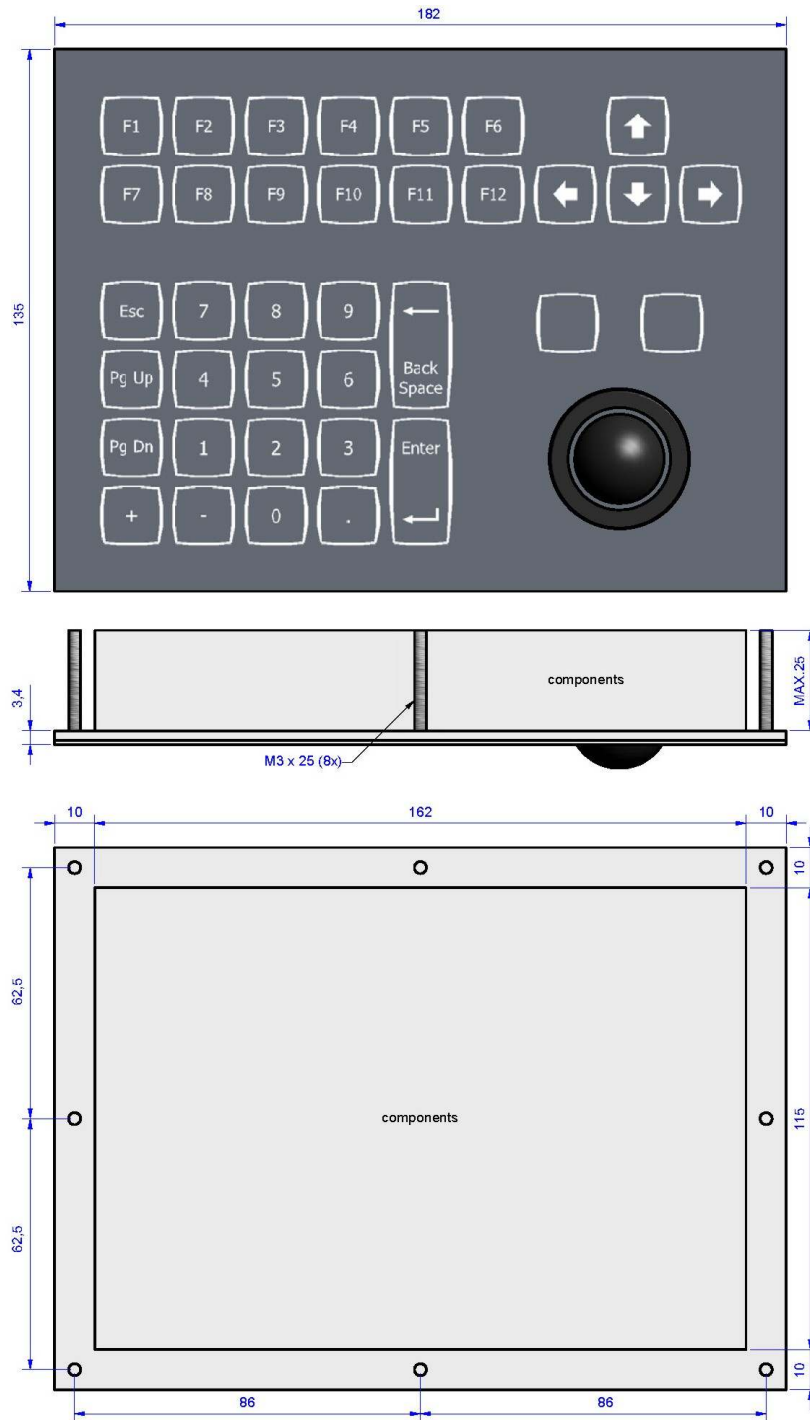

Dim in mm.

COLOURS

Keyboard Background :
RAL7016 anthrasite grey

Key edges & key legends :
RAL9016 Traffic white

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.