

Panel Mount LCD




24"(16:9) Specifications



Model Name	W24L100-PMA1/W24L110-PMA1(LED)
Viewable Size Image	24"(16:10)
Active Display Area(mm)	531.36(H)x298.89(V)
Pixel Pitch(mm)	0.276(H)x0.276(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	300
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	45W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional HDMI Input	Yes
Optional Touch Screen	Resistive

Remarks:W24L100series= VGA Input only
W24L110 series= VGA+Video Input

Mechanical Drawing

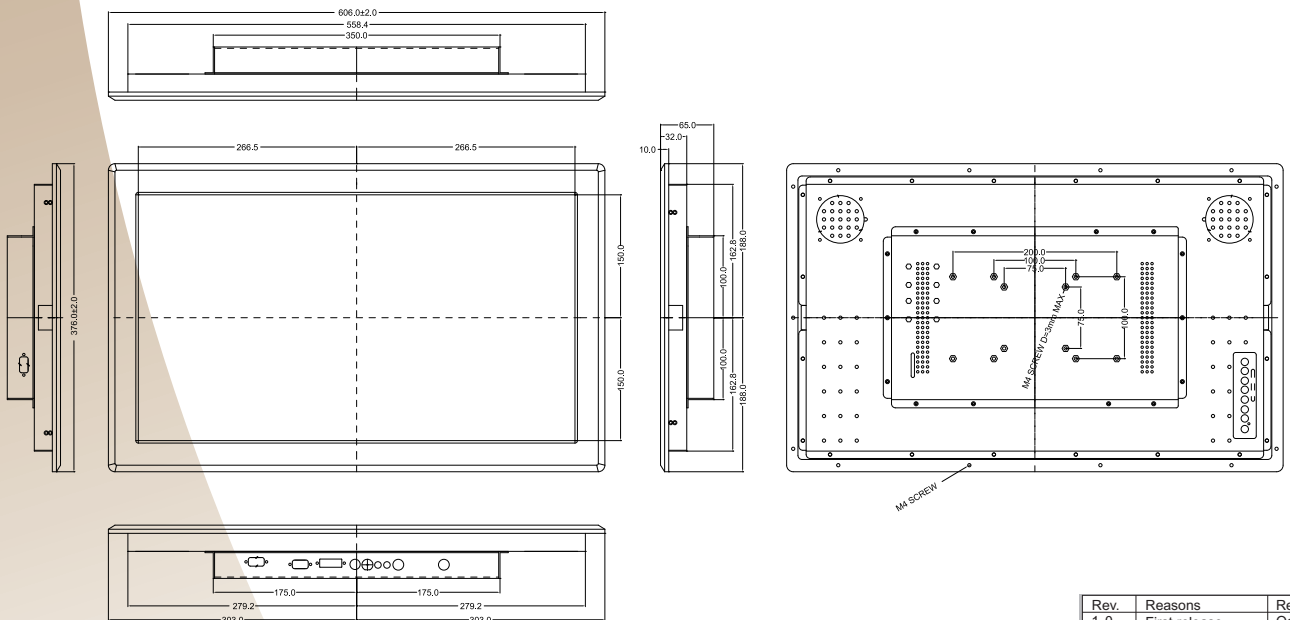

Rev.	Reasons	Revised Date
1.0	First release	Oct-20-11