# Chassis


3

## Bar-type Chassis Monitor

## 28"Wide(16:3) Specifications




HL1	
3)	
x 129.7(V)	
51(V)	
color)	
89~89 (V)	
31.5~60.0KHz/60~75Hz	
with External AC to DC Adapter (100~240V AC)	
normal operation	
S Compliant	
1/2B	
VI/HDMI/Audio	




### Accessories

VGA cable	D-sub 15 pin male to male	$\checkmark$
DVI cable	24 pin male to male	$\checkmark$
User Manual	User guide	$\checkmark$
User adapter	12V power adapter	$\checkmark$

## Mechanical Drawing:W28L100-CHL1

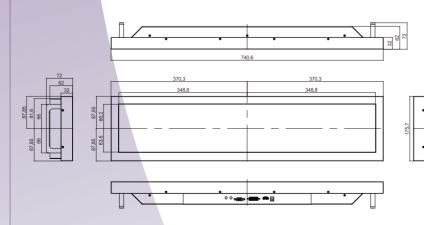



UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date	
1.0	First release	July-01-13	
1.1	Pic Change	Aug-19-13	

## Chassis

## Bar-type Chassis Monitor

### **Order Information**

Model name	I/O	Туре	Touch
W28L100	D-Sub15/DVI/HDMI/Audio	Chassis	N/A

### If your output device OS is Windows 7 and with Intel graphic card

- \* The monitor resolution is set to be fixed at 1366x256.
- ★ If you change the PC resolution to other mode, it will not show the proper image. You will need to re-boot PC in order to let the resolution back to 1366x256.

Resolution: 1366x254 (at 1:1 mode)



Monitor resolution is at 1366x256

### If your output device OS is not Windows 7:

If your output device OS is not Windows 7, the displayed content will always be the top third of the desktop screen.



## Application



Restaurant

Hotel Lobby

**Department Store** 

**Retail Store**