



### X117 Single Console

**1920 x 1200  
WUXGA**



### Drawer Features & Display Benefits

- ▶ 1U 17" widescreen LCD console drawer with VGA, DVI-D and HDMI w/ speaker
- ▶ 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ SUN Micro or MAC keyboard options available
- ▶ New enhanced aesthetics with molded front handle
- ▶ Front USB port for device access ( USB Hub KVM only )
- ▶ 2 post rack mounting available

### Options

- 3G / HD / SD-SDI Broadcast-grade input
- Audio input
- DC power : 12V / 24V / 48V / 110 ~ 125V

### Specifications

#### • LCD Panel

Size (diagonal) :	17.1" widescreen TFT
Max resolution :	1920 x 1200
Brightness (cd/m2) :	210
Backlight :	LED
Colors :	16.7 M, 8-bit
Contrast ratio (typ) :	600 : 1
Viewing angle (H/V) :	130° x 110°
Active area (mm) :	367 x 230
MTBF (hrs) :	20,000
Signal input :	VGA, DVI-D, HDMI

• **Casing Color :** Black ( RAL 9005 )

#### • Weight

Net :	10.9 kgs ( 24 lbs )
Gross :	15.8 kgs ( 34.8 lbs )

#### • Environmental

Operating :	0 to 55°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration ( 11 ms duration )
Vibration :	5~500Hz 1G RMS random vibration

#### • Regulatory

Safety :	FCC & CE certified
Environmental	RoHS2 & REACH compliant

#### • Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

#### • Dimensions

Product :	441.6 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
Packing :	590 x 768 x 140 mm / 23.2 x 30.2 x 5.5 inch

### Console Cable

#### CX-6


- 6 feet DVI-D console cable ( bundle )
- DVI-D + USB, server end
- DVI-D + DB15 ( USB KB & MS ), console port

#### CB-6


- 6 feet VGA console cable ( alternative )
- VGA + USB, server end
- DB15 ( VGA, USB KB & MS ), console port

### Standard Keyboard

**Ge** G keyboard integrated with touchpad

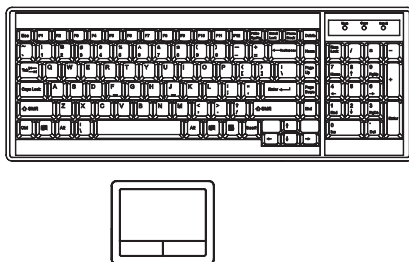

**Gb** G keyboard integrated with trackball

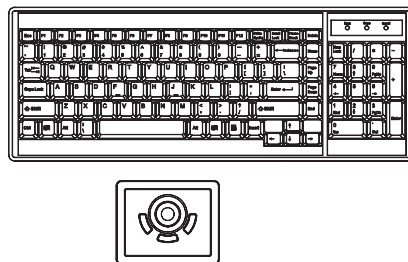

### Supporting layouts

<b>America</b>		United States
<b>EMEA</b>		United Kingdom
		Germany
		France
		Spain
		Norway
		Italy
		Russia
		Switzerland
		Netherlands
		Portugal
<b>Asia</b>		China
		Japan
		Korea
		Arabia
		Turkey

### Keyboard Options

\* US layout only

**Me** Mac keyboard with touchpad



**Mb** Mac keyboard with trackball

**Se** S keyboard with touchpad

**Sb** S keyboard with trackball



# 1U 17" Ultra High Resolution LCD KVM Drawer



- **Dimensions ( with KVM )**  
 Product : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch  
 Packing : 590 x 768 x 140 mm / 23.2 x 30.2 x 5.5 inch
- **Weight ( Net / Gross )**  
 Net : 12.1 kgs ( 26.6 lbs )  
 Gross : 18.1 kgs ( 39.8 lbs )
- **Casing Color :** Black ( RAL 9005 )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	X117 - MIP813	X117 - MIP1613	-
	1	1	2	X117 - MIP824	X117 - MIP1624	-
	1	1	0	X117 - M802	X117 - M1602	-
	1	2	0	X117 - M803	X117 - M1603	-
	1	3	0	X117 - M804	X117 - M1604	-

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	X117 - IP802	X117 - IP1602	-
	1	1	0	X117 - 802	X117 - 1602	-
1	0	0	X117 - S801	X117 - S1601	-	

Combo DB-15 KVM Cable : CE-6 / 10 / 15 ( 6, 10 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	X117 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 ( 6 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf)

USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	X117 - IP802H	X117 - IP1602H	-
	1	1	0	X117 - 802H	X117 - 1602H	-
1	0	0	X117 - 801H	X117 - 1601H	-	

USB KVM Cable : CB-6 / 10 / 15 ( 6, 10 or 15 ft )

### CV-1201D




#### DVI-D KVM Benefits

- ▶ 12-port DVI-D, USB & Audio KVM
- ▶ DVI-D single link support 1920 x 1200 transmission
- ▶ Support widescreen & native SUN 1152 x 900 resolution
- ▶ Multi-platform for PCs, SUN and Mac G3 / G4 Mac / iMac
- ▶ Hot pluggable, no software or drivers required

#### Switch Features & Options

- Support VESA DDC2B emulation & TMDS signal pass-through
- Port switching via push button & keyboard hotkeys

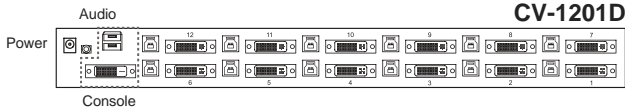

#### Ordering Information


Console	Local	Remote	IP	12-port
	1	0	0	<b>CV-1201D</b>


#### KVM Specification

<b>■ KVM Port</b>	
Number of ports:	12
Connector:	DVI-D connector USB 3.0 connector ( combined for keyboard, mouse & audio )
Connectivity:	Combo 4-in-1 KVM cable, 6 or 15 feet
<b>■ Local Console</b>	
Graphic Connector:	1 x DVI-D
Resolution:	Up to 1920 x 1200
Input device:	2 x USB type A for keyboard & mouse
Audio out:	1 x 3.5mm stereo audio
<b>■ Management</b>	
PC Selection:	Front button & hotkey
<b>■ Compatibility</b>	
Multi-platform:	Mix PCs, SUN and Mac G3 / G4 Mac / iMac
Support:	Windows 7 / Vista / 2003 / XP, Linux, Unix
<b>■ Power</b>	
Input:	Auto sensing 100 to 240VAC, 50 / 60 Hz
Consumption:	Max. 12 Watt, Standby 5 Watt

<b>■ Regulatory :</b>	
Safety:	FCC & CE certified
Environment:	RoHS2 & REACH compliant
<b>■ Environmental</b>	
Operating:	0 to 50°C
Storage:	-5 to 60°C
Relative humidity:	90%, non-condensing
Shock:	50G peak acceleration (11ms, half-sine wave)
Vibration:	58~100Hz / 0.98G (11ms / cycle)
<b>■ Product Information</b>	
Dimension (W x D x H):	443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch
Net weight:	2.5 kg / 5.5 lb
<b>■ Packing Information</b>	
Dimension (W x D x H):	500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
Gross weight:	5.4 kg / 11.9 lb

## KVM port connection

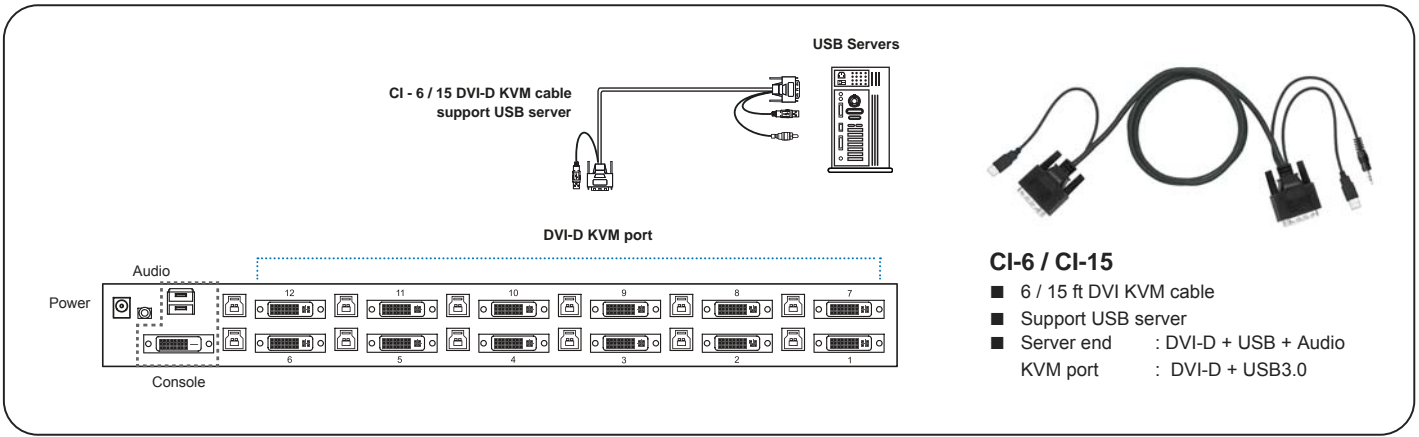

 For detailed product specifications and options, please download the user manual from the link below : [www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM.pdf)

## Front Panel - Port LED Indications

12 ports

