



RKP2417 / 2419 Single Console



Drawer Features & Display Benefits

- ▶ 2U dual slide 17" or 19" LCD console drawer
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ MAC or SUN Micro keyboard options available
- ▶ Short depth design of 480mm (18.9")
- ▶ New enhanced aesthetics with molded front handle
- ▶ Slide rails with fixed positions to prevent drawer movement when typing

Options

- S-Video + Composite (BNC)
- HDMI or DVI-D (either one)
- 17" / 19" Touchscreen : Capacitive, Resistive (1-point touch)
- DC power : 12V / 24V / 48V / 125V / 250V

Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

- **Speaker :** Built-in Dual Stereo Speakers (HDMI only)
2W x 2

- **Casing Color :** Black (RAL 9005)

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

	Net	Gross
RKP2417 :	20.4 kgs / 44.9 lbs	16.5 kgs / 36 lbs
RKP2419 :	20.5 kgs / 45.1 lbs	17 kgs / 37.4 lbs

• Dimensions (single console)

Product :	441.6 x 480 x 88 mm / 17.4 x 18.1 x 3.5 inch
Packing :	585 x 620 x 190 mm / 23 x 24.4 x 7.5 inch

Console Cable

CB-6

- 6 feet VGA console cable (bundle)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port



or

CE-6 (for PS/2 KB / MS)


- 6 feet Combo KVM cable (alternative)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Standard Keyboard

Ge G keyboard integrated with touchpad

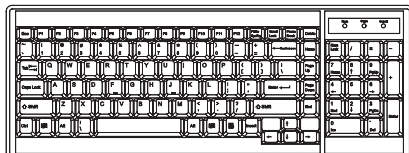

Gb G keyboard integrated with trackball

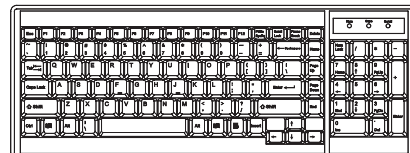

Supporting layouts

America		United States			
EMEA					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

Mb Mac keyboard with trackball

Sb S keyboard with trackball



