

## IP65 Solution



### 21.5" (16:9)


#### Specifications



Model Name	W22L100-IPA3(LED)
Viewable Size Image	21.5"(16:9)
Active Display Area(mm)	476.64 (H) x 268.11 (V)
Pixel Pitch(mm)	0.248 (H) x 0.248 (V)
Number of Pixels	1920x1080
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bit/color)
Brightness(cd/m <sup>2</sup> )	250(typ.)
Viewing Angle(CR>=10)	170 (H); 160 (V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz / 60~75Hz
Recommended Resolution	1920x1200 @ 60Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	50W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks: W22L100 series= VGA input only  
W22L110 series= VGA+Video Input

#### Mechanical Drawing

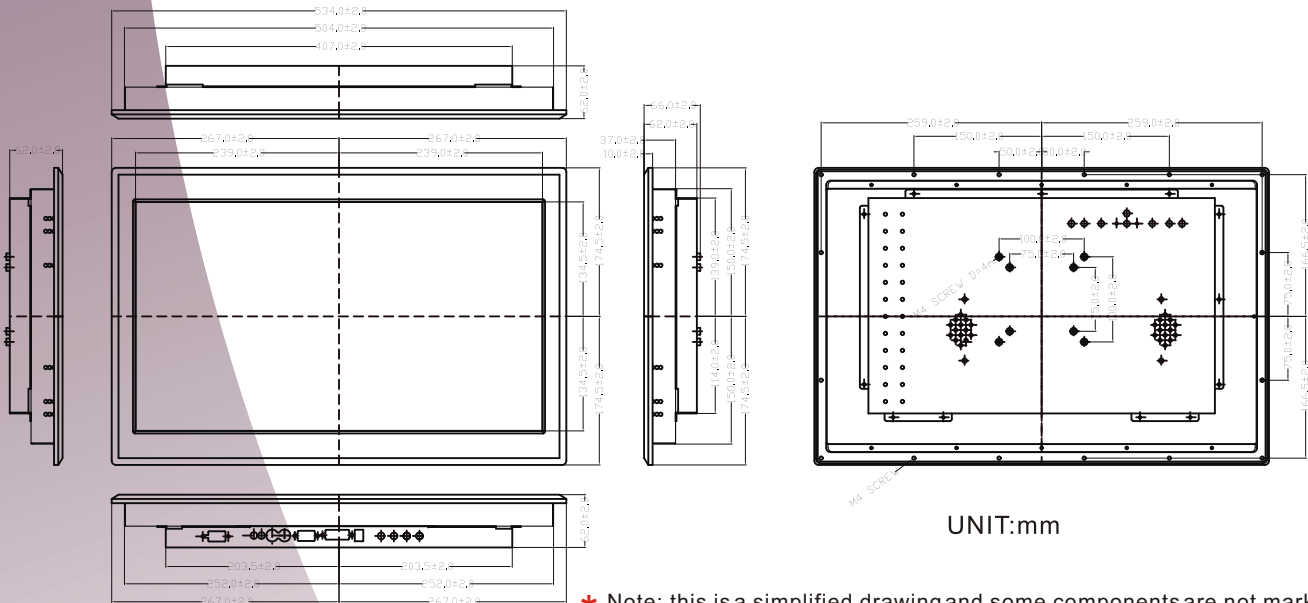

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.