

# InfraPower® Enclosure Power Management Solutions



InfraPower® Intelligent Remote Power Management over IP

Level: 01 (0101010101010101) Status: Normal Auto Data refresh: 30  
 PDU name: PDS-PDU0101 Location: 0001 Circuit A: 4.8 A / 13 A (Load / Alarm)  
 Location: 0001 Circuit B: 8.2 A / 13 A (Load / Alarm) Priority: 0001

Circuit A				Circuit B			
Outlet	Device	Status	Switch	Outlet	Device	Status	Switch
1	Switch_2000	ON	OFF	13	Storage_U_1800	OFF	ON
2	Power_1000	ON	OFF	14	Storage_U_2000	OFF	ON
3	Network_Fat_1	ON	OFF	16	Storage_U_2000	OFF	ON
4	Network_Fat_2	ON	OFF	18	Storage_U_1400	ON	ON
5	Server_U_16100	ON	OFF	17	Storage_U_1400	ON	OFF
6	Server_U_16100	ON	OFF	18	Power_Driver_1	ON	OFF
7	Server_U_16100	ON	OFF	19	Storage_U_8000	ON	OFF
8	Server_U_16100	ON	OFF	20	Storage_U_16000	ON	OFF
9	Server_U_16100	ON	OFF	21	Storage_U_16000	ON	OFF
10	Server_U_16100	ON	OFF	22	Server_U_16100	ON	OFF
11	Server_U_20000	OFF	ON	23	UPS_1	ON	OFF
12	Server_U_20000	OFF	ON	24	UPS_2	ON	OFF










































Auto Refresh: 30

Apply Cancel








<b>Part I</b>	<b>Key Benefits of InfraPower PDU Series</b>	-----	P.1 - 2
<b>Part II</b>	<b>MTS Switched PDU</b>	-----	P.3
■	US NEMA / IEC320	  	----- P.4
■	IEC320	 	----- P.5
■	UK BS1363	  	----- P.6
<b>Part III</b>	<b>MT Monitored PDU</b>	-----	P.7
■	US NEMA / IEC320	  	----- P.8
■	IEC320	 	----- P.9
■	UK BS1363 / IEC320	    	----- P.10
■	CEE 7 Schuko		----- P.10
<b>Part IV</b>	<b>Remote PDU Access &amp; Remote Software</b>		
■	Remote Access via an <i>IP dongle</i>	-----	P.11
■	Remote Access via <i>Serial</i>	-----	P.12
■	Remote Access via an <i>IP KVM switch</i>	-----	P.13
■	InfraPower Manager	-----	P.14
<b>Part V</b>	<b>MD Metered PDU</b>	-----	P.15
■	US NEMA / IEC320	  	----- P.16
■	IEC320	 	----- P.17
■	UK BS1363 / IEC320	    	----- P.18
■	CEE 7 Schuko		----- P.18
<b>Part VI</b>	<b>S Standard PDU</b>	-----	P.19
■	US NEMA / IEC320	  	----- P.19
■	IEC320	 	----- P.20
■	UK BS1363 / IEC320	    	----- P.21
■	CEE 7 Schuko		----- P.21
<b>Part VII</b>	<b>Outlet &amp; Power Plug Options</b>	-----	P.22
<b>Part VIII</b>	<b>InfraPower Series Selection Chart</b>	-----	P.23

## From Basic to Switched - Broad Range of Functionality



InfraPower provides a complete power management solution from basic power distribution through to metered, monitored and switched. Customers can meet end to end equipment and management requirements using InfraPower whilst meeting budget and application demands. InfraPower is backed by a Two year warranty for piece of mind reliability with the option to purchase a Five year maintenance plan for electronic component swap out.

## Key Benefits of

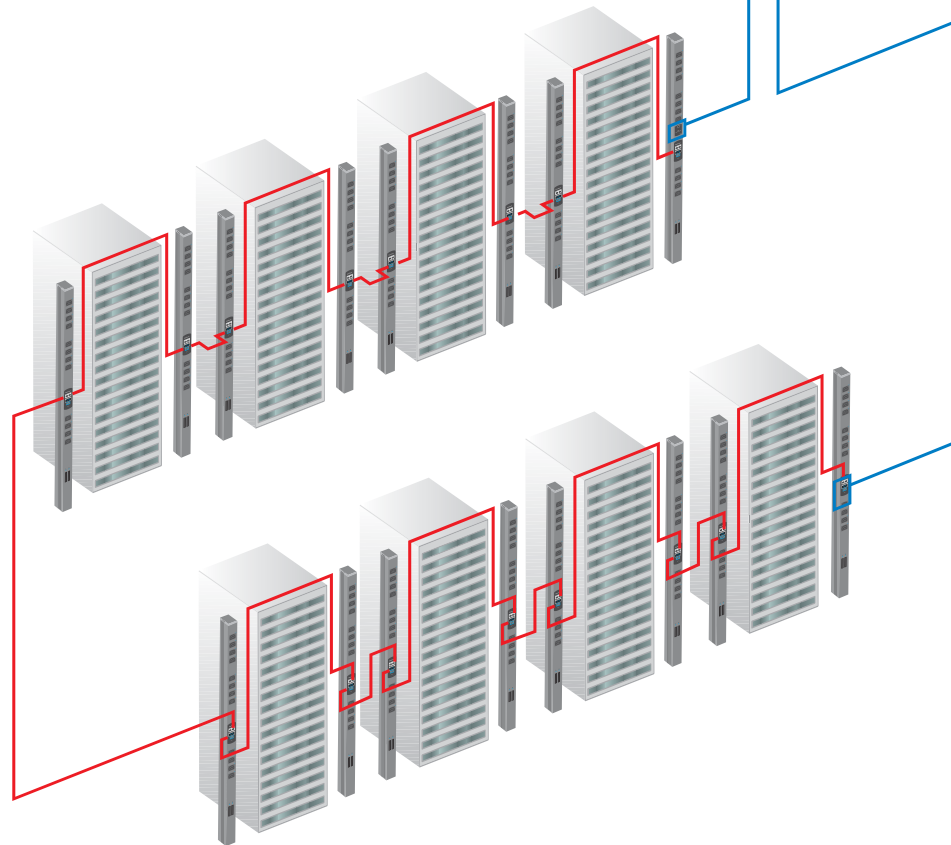


## Scalable Flexibility




InfraPower has been designed to be highly scalable, its entry level configuration offers low cost serial access whilst the optional hot pluggable IP Dongle enhances the MTS switched or MT monitored PDUs to enable IP functionality allowing its users to work remotely over an Ethernet network with the PDUs when not based at the equipment site.

# InfraPower® PDU Series

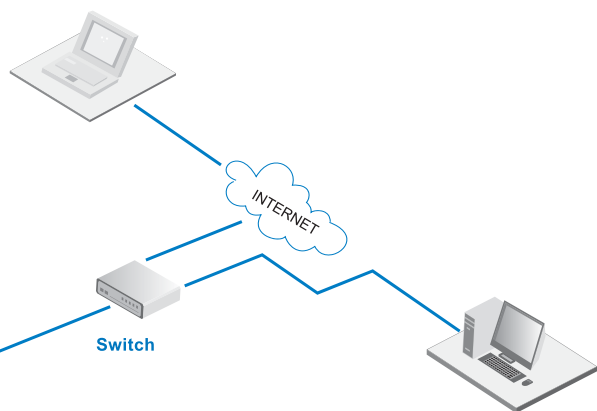

## User-friendly Web-Based GUI

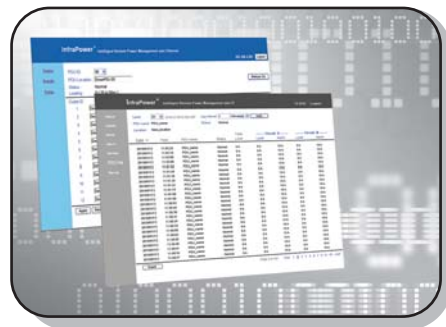

The InfraPower web-based GUI provides an easy-to-learn tools for remote management on the intelligent MTS Switched and MT Monitored PDUs. The GUI software is simply accessed via a standard web browser and is capable of automatically discovering all the connected switched and monitored PDUs. It provides information including current consumption, overload alarm threshold, PDU name and outlet name. And it allows individual remote switch ON / OFF function for switched PDU models.



## Centralized Remote Management for High Density Power Distribution



The InfraPower Switched and Monitored PDUs are designed to support daisy chain connections allowing up to 16 PDUs to be cascaded via Cat6 cables. All the cascaded PDUs will be accessed via a single network IP address and to be real-time remote monitored / controlled by a web-based GUI. InfraPower allows a centralized real-time remote management on high density of cascaded PDUs.

## Complete Range of Receptables and Input Plugs



InfraPower provides complete solution with receptacles available in UK, IEC C13 & C19, Schuko and United States formats. For ease of installation, all InfraPower solutions can be fitted with input plugs of either IEC C20, EN60309 16Amp, EN60309 32 Amp or unterminated – cord length can be ordered to suit the installation.



The InfraPower MTS Series switched PDU is a Rackmount industrial grade PDU for mission critical data centers and remote install sites. The MTS PDU allows remote outlet control of individual on/off power socket via a simple, secure web based GUI management interface. MTS can be cascaded up to a maximum of 16 PDUs using low cost Cat6 patch cords allowing access control and monitoring via a single IP address over an Ethernet network. The real time remote control and access provided by the MTS series can help reducing manpower and related travel costs.



## Features & Benefits

- Allows remote control to individual outlets and remote monitoring of the aggregate load
- True RMS ammeter provides accurate power measurement
- LED indicates the switch ON/ OFF status for each outlet
- IP addressable remote control and monitoring anywhere through IP dongle or IP KVM switch
- Daisy chain connection allows up to 16 intelligent PDUs cascaded for central management by using single IP
- Web-base GUI management for centralized management of real time monitoring and control
- Alert users to the event by E-mail and take action before the power overload by using InfraPower Manager GUI and IP dongle
- Outlet naming, passwords, secure web server and password protection
- Multiple configurations for variety of application environments and power requirement
- Wide variety of outlets and input plugs for different power requirements
- Zero U (vertical) and rackmount (horizontal) form factors
- Receptacle options from 4 to 24
- 2 year warranty, upgradable to 5 year maintenance



### Switched PDU

Allows the remote outlet control of individual ON / OFF power socket via a GUI management interface.



### RMS current meter

Field-replaceable design helps eliminate maintenance downtime by simply replacing defective current meters without interruption of service.



### Cascade

Supports daisy chain connection allowing up to 16 PDUs to be cascaded via Cat6 cables.



### Remote access via Hot pluggable IP dongle

Cost effective remote monitoring and control over IP



### Remote access via IP KVM switch

Allows the network manager to access both the KVM switch and the remote PDU.



### Circuit breaker / Resettable fuse

Individual branch rated circuit breakers protect load segments to ensure increasing reliability. Circuit breakers with flat rockers are fully shrouded to prevent accidental on/off operation.



Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, inch)
V24US-20A-MTS	0 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2.6 x 78.7
V24US-30A-MTS	0 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2.6 x 78.7
V20US-20A-MTS	0 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2.6 x 68.9
V20US-30A-MTS	0 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2.6 x 68.9
V16US-20A-MTS	0 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2.6 x 59.1
V16US-30A-MTS	0 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2.6 x 59.1
V12US-20A-MTS	0 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2.6 x 52.7
V12US-30A-MTS	0 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2.6 x 52.7
V8US-20A-MTS	0 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2.6 x 40.8
V8US-30A-MTS	0 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2.6 x 40.8
V24C13-30A-MTS	0 U	24 outlets	(24) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 78.7
V20C13-30A-MTS	0 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 68.9
V16C13-30A-MTS	0 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 59.1
V12C13-30A-MTS	0 U	12 outlets	(12) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 52.7
V8C13-30A-MTS	0 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 40.8
V20C13/4C19-30A-MTS	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 78.7
V20C13/2C19-30A-MTS	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 78.7
V16C13/4C19-30A-MTS	0 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 68.9
V16C13/2C19-30A-MTS	0 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 68.9
V12C13/4C19-30A-MTS	0 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 59.1
V12C13/2C19-30A-MTS	0 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 59.1
V8C13/4C19-30A-MTS	0 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 52.7
V8C13/2C19-30A-MTS	0 U	10 outlets	(8) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 52.7
V4C13/4C19-30A-MTS	0 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 40.8
V4C13/2C19-30A-MTS	0 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2.6 x 40.8
H20US-20A-MTS	2 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H20US-30A-MTS	2 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H16US-20A-MTS	2 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H16US-30A-MTS	2 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H12US-20A-MTS	2 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H12US-30A-MTS	2 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H8US-20A-MTS	1 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H8US-30A-MTS	1 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H4US-20A-MTS	1 U	4 outlets	(4) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H4US-30A-MTS	1 U	4 outlets	(4) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H20C13-30A-MTS	2 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H16C13-30A-MTS	2 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H12C13-30A-MTS	2 U	12 outlets	(12) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H8C13-30A-MTS	1 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H4C13-30A-MTS	1 U	4 outlets	(4) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H16C13/2C19-30A-MTS	2 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H12C13/4C19-30A-MTS	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H12C13/2C19-30A-MTS	2 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H8C13/4C19-30A-MTS	2 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H4C13/4C19-30A-MTS	1 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H4C13/2C19-30A-MTS	1 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8



Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24C13-16A-MTS	0 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	55 x 65 x 2000
V24C13-20A-MTS	0 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	55 x 65 x 2000
V24C13-32A-MTS	0 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	55 x 65 x 2000
V20C13-16A-MTS	0 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	55 x 65 x 1750
V20C13-20A-MTS	0 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	55 x 65 x 1750
V20C13-32A-MTS	0 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	55 x 65 x 1750
V16C13-16A-MTS	0 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	55 x 65 x 1500
V16C13-20A-MTS	0 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	55 x 65 x 1500
V16C13-32A-MTS	0 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	55 x 65 x 1500
V12C13-16A-MTS	0 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	55 x 65 x 1337.5
V12C13-20A-MTS	0 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	55 x 65 x 1337.5
V12C13-32A-MTS	0 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	55 x 65 x 1337.5
V8C13-16A-MTS	0 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	55 x 65 x 1037.5
V8C13-20A-MTS	0 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	55 x 65 x 1037.5
V8C13-32A-MTS	0 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	55 x 65 x 1037.5
V20C13/4C19-32A-MTS	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 65 x 2000
V20C13/2C19-32A-MTS	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 65 x 2000
V16C13/4C19-32A-MTS	0 U	20 outlets	(16) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1750
V16C13/2C19-32A-MTS	0 U	18 outlets	(16) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1750
V12C13/4C19-32A-MTS	0 U	16 outlets	(12) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1500
V12C13/2C19-32A-MTS	0 U	14 outlets	(12) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1500
V8C13/4C19-32A-MTS	0 U	12 outlets	(8) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1337.5
V8C13/2C19-32A-MTS	0 U	10 outlets	(8) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1337.5
V4C13/4C19-32A-MTS	0 U	8 outlets	(4) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1037.5
V4C13/2C19-32A-MTS	0 U	6 outlets	(4) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 65 x 1037.5
H20C13-16A-MTS	2 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 89
H20C13-20A-MTS	2 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 89
H20C13-32A-MTS	2 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	440 x 220 x 89
H16C13-16A-MTS	2 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 89
H16C13-20A-MTS	2 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 89
H16C13-32A-MTS	2 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	440 x 220 x 89
H12C13-16A-MTS	2 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 89
H12C13-20A-MTS	2 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 89
H12C13-32A-MTS	2 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	440 x 220 x 89
H8C13-16A-MTS	1 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H8C13-20A-MTS	1 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H8C13-32A-MTS	1 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H4C13-16A-MTS	1 U	4 outlets	(4) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H4C13-20A-MTS	1 U	4 outlets	(4) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H4C13-32A-MTS	1 U	4 outlets	(4) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H16C13/2C19-32A-MTS	2 U	18 outlets	(16) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H12C13/4C19-32A-MTS	2 U	16 outlets	(12) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H12C13/2C19-32A-MTS	2 U	14 outlets	(12) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H8C13/4C19-32A-MTS	2 U	12 outlets	(8) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H4C13/4C19-32A-MTS	1 U	8 outlets	(4) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H4C13/2C19-32A-MTS	1 U	6 outlets	(4) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45





Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V20UK-13A-MTS	0 U	20 outlets	(20) BS1363	BS1363	3M	230V	13A	55 x 65 x 2000
V20UK-16A-MTS	0 U	20 outlets	(20) BS1363	60309 / C20	3M	230V	16A	55 x 65 x 2000
V20UK-20A-MTS	0 U	20 outlets	(20) BS1363	Open end	3M	230V	20A	55 x 65 x 2000
V20UK-32A-MTS	0 U	20 outlets	(20) BS1363	60309	3M	230V	32A	55 x 65 x 2000
V16UK-13A-MTS	0 U	16 outlets	(16) BS1363	BS1363	3M	230V	13A	55 x 65 x 1750
V16UK-16A-MTS	0 U	16 outlets	(16) BS1363	60309 / C20	3M	230V	16A	55 x 65 x 1750
V16UK-20A-MTS	0 U	16 outlets	(16) BS1363	Open end	3M	230V	20A	55 x 65 x 1750
V16UK-32A-MTS	0 U	16 outlets	(16) BS1363	60309	3M	230V	32A	55 x 65 x 1750
V12UK-13A-MTS	0 U	12 outlets	(12) BS1363	BS1363	3M	230V	13A	55 x 65 x 1337.5
V12UK-16A-MTS	0 U	12 outlets	(12) BS1363	60309 / C20	3M	230V	16A	55 x 65 x 1337.5
V12UK-20A-MTS	0 U	12 outlets	(12) BS1363	Open end	3M	230V	20A	55 x 65 x 1337.5
V12UK-32A-MTS	0 U	12 outlets	(12) BS1363	60309	3M	230V	32A	55 x 65 x 1337.5
V8UK-13A-MTS	0 U	8 outlets	(8) BS1363	BS1363	3M	230V	13A	55 x 65 x 1037.5
V8UK-16A-MTS	0 U	8 outlets	(8) BS1363	60309 / C20	3M	230V	16A	55 x 65 x 1037.5
V8UK-20A-MTS	0 U	8 outlets	(8) BS1363	Open end	3M	230V	20A	55 x 65 x 1037.5
V8UK-32A-MTS	0 U	8 outlets	(8) BS1363	60309	3M	230V	32A	55 x 65 x 1037.5



## Remote outlet control of individual ON / OFF power socket

InfraPower MTS Switched PDU series allows the IP remote outlet control of individual on / off power socket via the management interface (optional InfraPower Manager GUI, or free bundled PPS-01/ IPS-01 GUI). The power on / off status of the individual power socket can be indicated remotely on the GUI, or locally by the corresponding LED.

The screenshot shows the InfraPower Manager GUI with the following details:

- Level:** 01 V24C13-32A-MTS
- Status:** Normal
- PDU name:** A003-PDU\_MTS\_2
- Circuit A:** 4.8 A / 13 A (Load / Alarm)
- Location:** A003
- Circuit B:** 6.2 A / 13 A (Load / Alarm)
- Auto data refresh:** Enabled

Circuit A				Circuit B			
Outlet	Device	Status	Switch	Outlet	Device	Status	Switch
1	Switch_2000	ON	OFF	13	Sales_2_PE1850	OFF	ON
2	Router_1500	ON	OFF	14	Exchange_1_x360	OFF	ON
3	Remote Fan_1	ON	OFF	15	Exchange_2_x360	OFF	ON
4	Remote Fan_2	ON	OFF	16	Database_1_V450	OFF	ON
5	Admin_1_PE1950	ON	OFF	17	Database_2_V440	ON	OFF
6	Admin_2_PE1950	ON	OFF	18	KVM Drawer_1	ON	OFF
7	Admin_3_PE1950	ON	OFF	19	Storage_1_E4000	ON	OFF
8	App_1_PE1950	ON	OFF	20	Storage_2_M6000	ON	OFF
9	App_2_PE1950	ON	OFF	21	Storage_3_M6000	ON	OFF
10	Account_3_PE1950	ON	OFF	22	Account_4_PE1950	ON	OFF
11	SAN_CX3000	OFF	ON	23	UPS_1	ON	OFF
12	Sales_1_PE2950	OFF	ON	24	UPS_2	ON	OFF

Buttons at the bottom: Apply, Cancel, Reset PDU, Factory default.

**Remarks:** Interface layouts and functions of InfraPower Manager, PPS-01 and IPS-01 are different. Please refer to the software part of the catalogue for details.





The InfraPower MT Series monitored PDU is a Rackmount industrial grade PDU for mission critical data centers and remote install sites. The MT PDU allows true RMS current monitoring via a simple, secure web based GUI management interface. MT can be cascaded up to a maximum of 16 PDUs using low cost Cat6 patch cords allowing access control and monitoring via a single IP address over an Ethernet network. The real time monitoring provided by the MT series can help users with capacity planning and improving the overall efficiency of the data center.



## Features & Benefits

- Provides local & remote monitoring to the aggregate current being drawn on each PDU
- True RMS current monitoring allows users to receive the most accurate current reading
- IP addressable remote control and monitoring anywhere through IP dongle or IP KVM switch
- Supports daisy chain connection to maximum 16 intelligent PDUs
- Web-base GUI management software allow real time monitoring at anytime and anywhere
- Alert users to the event by E-mail and take action before the power overload by using InfraPower Manager GUI and IP dongle
- Outlet naming, passwords, secure web server and password protection
- Wide range of input and output connections allows users to adapt to different power requirements
- Zero U (vertical) and rackmount (horizontal) form factors
- Receptacle options from 2 to 24
- 2 year warranty, upgradable to 5 year maintenance



### Monitored PDU

Easy to read digital ammeter display with threshold alarm capability



### RMS current meter

Field-replaceable design helps eliminate maintenance downtime by simply replacing defective current meters without interruption of service.



### Cascade

Supports daisy chain connection allowing up to 16 PDUs to be cascaded via Cat6 cables.



### Remote access via Hot pluggable IP dongle

Cost effective remote monitoring and control over IP



### Remote access via IP KVM switch

Allows the network manager to access both the KVM switch and the remote PDU.



### Circuit breaker / Resettable fuse

Individual branch rated circuit breakers protect load segments to ensure increasing reliability. Circuit breakers with flat rockers are fully shrouded to prevent accidental on/off operation.

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, inch)
V24US-20A-MT	0 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 59.1
V24US-30A-MT	0 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 59.1
V20US-20A-MT	0 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 52.7
V20US-30A-MT	0 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 52.7
V16US-20A-MT	0 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 46.8
V16US-30A-MT	0 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 46.8
V12US-20A-MT	0 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 40.8
V12US-30A-MT	0 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 40.8
V8US-20A-MT	0 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 34.9
V8US-30A-MT	0 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 34.9
V24C13-30A-MT	0 U	24 outlets	(24) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 59.1
V20C13-30A-MT	0 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 52.7
V16C13-30A-MT	0 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V12C13-30A-MT	0 U	12 outlets	(12) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V8C13-30A-MT	0 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
V20C13/4C19-30A-MT	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 59.1
V20C13/2C19-30A-MT	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 59.1
V16C13/4C19-30A-MT	0 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 52.7
V16C13/2C19-30A-MT	0 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 52.7
V12C13/4C19-30A-MT	0 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V12C13/2C19-30A-MT	0 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V8C13/4C19-30A-MT	0 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V8C13/2C19-30A-MT	0 U	10 outlets	(8) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V4C13/4C19-30A-MT	0 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
V4C13/2C19-30A-MT	0 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
H24US-20A-MT	2 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H24US-30A-MT	2 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H20US-20A-MT	2 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H20US-30A-MT	2 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H16US-20A-MT	2 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 3.5
H16US-30A-MT	2 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 3.5
H10US-20A-MT	1 U	10 outlets	(10) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H10US-30A-MT	1 U	10 outlets	(10) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H8US-20A-MT	1 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H8US-30A-MT	1 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H6US-20A-MT	1 U	6 outlets	(6) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H6US-30A-MT	1 U	6 outlets	(6) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H5US-20A-MT	1 U	5 outlets	(5) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H5US-30A-MT	1 U	5 outlets	(5) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H4US-20A-MT	1 U	4 outlets	(4) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 8.7 x 1.8
H4US-30A-MT	1 U	4 outlets	(4) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 8.7 x 1.8
H20C13-30A-MT	2 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H16C13-30A-MT	2 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H10C13-30A-MT	1 U	10 outlets	(10) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H8C13-30A-MT	1 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H6C13-30A-MT	1 U	6 outlets	(6) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H5C13-30A-MT	1 U	5 outlets	(5) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H4C13-30A-MT	1 U	4 outlets	(4) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H16C13/4C19-30A-MT	2 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H18C13/2C19-30A-MT	2 U	20 outlets	(18) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H12C13/4C19-30A-MT	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H14C13/2C19-30A-MT	2 U	16 outlets	(14) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 3.5
H4C13/4C19-30A-MT	1 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H6C13/2C19-30A-MT	1 U	8 outlets	(6) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H2C13/4C19-30A-MT	1 U	6 outlets	(2) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H4C13/2C19-30A-MT	1 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H4C19-30A-MT	1 U	4 outlets	(4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H2C13/2C19-30A-MT	1 U	4 outlets	(2) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8
H2C19-30A-MT	1 U	2 outlets	(2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 8.7 x 1.8



Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24C13-16A-MT	0 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1500
V24C13-20A-MT	0 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1500
V24C13-32A-MT	0 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1500
V20C13-16A-MT	0 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1337.5
V20C13-20A-MT	0 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1337.5
V20C13-32A-MT	0 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1337.5
V16C13-16A-MT	0 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1187.5
V16C13-20A-MT	0 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1187.5
V16C13-32A-MT	0 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1187.5
V12C13-16A-MT	0 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1037.5
V12C13-20A-MT	0 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1037.5
V12C13-32A-MT	0 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1037.5
V8C13-16A-MT	0 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 887.5
V8C13-20A-MT	0 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 887.5
V8C13-32A-MT	0 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	55 x 50 x 887.5
V20C13/4C19-32A-MT	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1500
V20C13/2C19-32A-MT	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1500
V16C13/4C19-32A-MT	0 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1337.5
V16C13/2C19-32A-MT	0 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1337.5
V12C13/4C19-32A-MT	0 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V12C13/2C19-32A-MT	0 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V8C13/4C19-32A-MT	0 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V8C13/2C19-32A-MT	0 U	10 outlets	(8) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V4C13/4C19-32A-MT	0 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
V4C13/2C19-32A-MT	0 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
H20C13-16A-MT	2 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 89
H20C13-20A-MT	2 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 89
H20C13-32A-MT	2 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	440 x 220 x 89
H16C13-16A-MT	2 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 89
H16C13-20A-MT	2 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 89
H16C13-32A-MT	2 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	440 x 220 x 89
H10C13-16A-MT	1 U	10 outlets	(10) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H10C13-20A-MT	1 U	10 outlets	(10) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H10C13-32A-MT	1 U	10 outlets	(10) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H8C13-16A-MT	1 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H8C13-20A-MT	1 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H8C13-32A-MT	1 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H6C13-16A-MT	1 U	6 outlets	(6) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H6C13-20A-MT	1 U	6 outlets	(6) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H6C13-32A-MT	1 U	6 outlets	(6) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H5C13-16A-MT	1 U	5 outlets	(5) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H5C13-20A-MT	1 U	5 outlets	(5) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H5C13-32A-MT	1 U	5 outlets	(5) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H4C13-16A-MT	1 U	4 outlets	(4) IEC320 C13	60309 / C20	3M	220V	16A	440 x 220 x 45
H4C13-20A-MT	1 U	4 outlets	(4) IEC320 C13	Open end	3M	220V	20A	440 x 220 x 45
H4C13-32A-MT	1 U	4 outlets	(4) IEC320 C13	60309	3M	220V	32A	440 x 220 x 45
H16C13/4C19-32A-MT	2 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H18C13/2C19-32A-MT	2 U	20 outlets	(18) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H12C13/4C19-32A-MT	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H14C13/2C19-32A-MT	2 U	16 outlets	(14) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 89
H4C13/4C19-32A-MT	1 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H6C13/2C19-32A-MT	1 U	8 outlets	(6) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H2C13/4C19-32A-MT	1 U	6 outlets	(2) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H4C13/2C19-32A-MT	1 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H4C19-32A-MT	1 U	4 outlets	(4) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H2C13/2C19-32A-MT	1 U	4 outlets	(2) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45
H2C19-32A-MT	1 U	2 outlets	(2) IEC320 C19	60309	3M	220V	32A	440 x 220 x 45




Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24UK-13A-MT	0 U	24 outlets	(24) BS1363	BS1363	3M	230V	13A	55 x 50 x 2000
V24UK-16A-MT	0 U	24 outlets	(24) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 2000
V24UK-20A-MT	0 U	24 outlets	(24) BS1363	Open end	3M	230V	20A	55 x 50 x 2000
V24UK-32A-MT	0 U	24 outlets	(24) BS1363	60309	3M	230V	32A	55 x 50 x 2000
V20UK-13A-MT	0 U	20 outlets	(20) BS1363	BS1363	3M	230V	13A	55 x 50 x 1750
V20UK-16A-MT	0 U	20 outlets	(20) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1750
V20UK-20A-MT	0 U	20 outlets	(20) BS1363	Open end	3M	230V	20A	55 x 50 x 1750
V20UK-32A-MT	0 U	20 outlets	(20) BS1363	60309	3M	230V	32A	55 x 50 x 1750
V16UK-13A-MT	0 U	16 outlets	(16) BS1363	BS1363	3M	230V	13A	55 x 50 x 1500
V16UK-16A-MT	0 U	16 outlets	(16) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1500
V16UK-20A-MT	0 U	16 outlets	(16) BS1363	Open end	3M	230V	20A	55 x 50 x 1500
V16UK-32A-MT	0 U	16 outlets	(16) BS1363	60309	3M	230V	32A	55 x 50 x 1500
V12UK-13A-MT	0 U	12 outlets	(12) BS1363	BS1363	3M	230V	13A	55 x 50 x 1337.5
V12UK-16A-MT	0 U	12 outlets	(12) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1337.5
V12UK-20A-MT	0 U	12 outlets	(12) BS1363	Open end	3M	230V	20A	55 x 50 x 1337.5
V12UK-32A-MT	0 U	12 outlets	(12) BS1363	60309	3M	230V	32A	55 x 50 x 1337.5
V8UK-13A-MT	0 U	8 outlets	(8) BS1363	BS1363	3M	230V	13A	55 x 50 x 1037.5
V8UK-16A-MT	0 U	8 outlets	(8) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1037.5
V8UK-20A-MT	0 U	8 outlets	(8) BS1363	Open end	3M	230V	20A	55 x 50 x 1037.5
V8UK-32A-MT	0 U	8 outlets	(8) BS1363	60309	3M	230V	32A	55 x 50 x 1037.5
V10UK/8C13/6C19-32A-MT	0 U	24 outlets	(10) BS1363/ (8) IEC320 C13/ (6) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1750
V10UK/8C13/4C19-32A-MT	0 U	22 outlets	(10) BS1363/ (8) IEC320 C13/ (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1750
V8UK/8C13/4C19-32A-MT	0 U	20 outlets	(8) BS1363/ (8) IEC320 C13/ (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V10UK/4C13/4C19-32A-MT	0 U	18 outlets	(10) BS1363/ (4) IEC320 C13/ (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V10UK/4C13/2C19-32A-MT	0 U	16 outlets	(10) BS1363/ (4) IEC320 C13/ (2) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500



Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V20SCH-16A-MT	0 U	20 outlets	(20) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1500
V20SCH-20A-MT	0 U	20 outlets	(20) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1500
V20SCH-32A-MT	0 U	20 outlets	(20) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1500
V16SCH-16A-MT	0 U	16 outlets	(16) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1337.5
V16SCH-20A-MT	0 U	16 outlets	(16) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1337.5
V16SCH-32A-MT	0 U	16 outlets	(16) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1337.5
V12SCH-16A-MT	0 U	12 outlets	(12) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1187.5
V12SCH-20A-MT	0 U	12 outlets	(12) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1187.5
V12SCH-32A-MT	0 U	12 outlets	(12) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1187.5
V8SCH-16A-MT	0 U	8 outlets	(8) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 887.5
V8SCH-20A-MT	0 U	8 outlets	(8) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 887.5
V8SCH-32A-MT	0 U	8 outlets	(8) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 887.5



# To Remotely Access and Configure your MTS / MT series PDU via an *IP dongle*

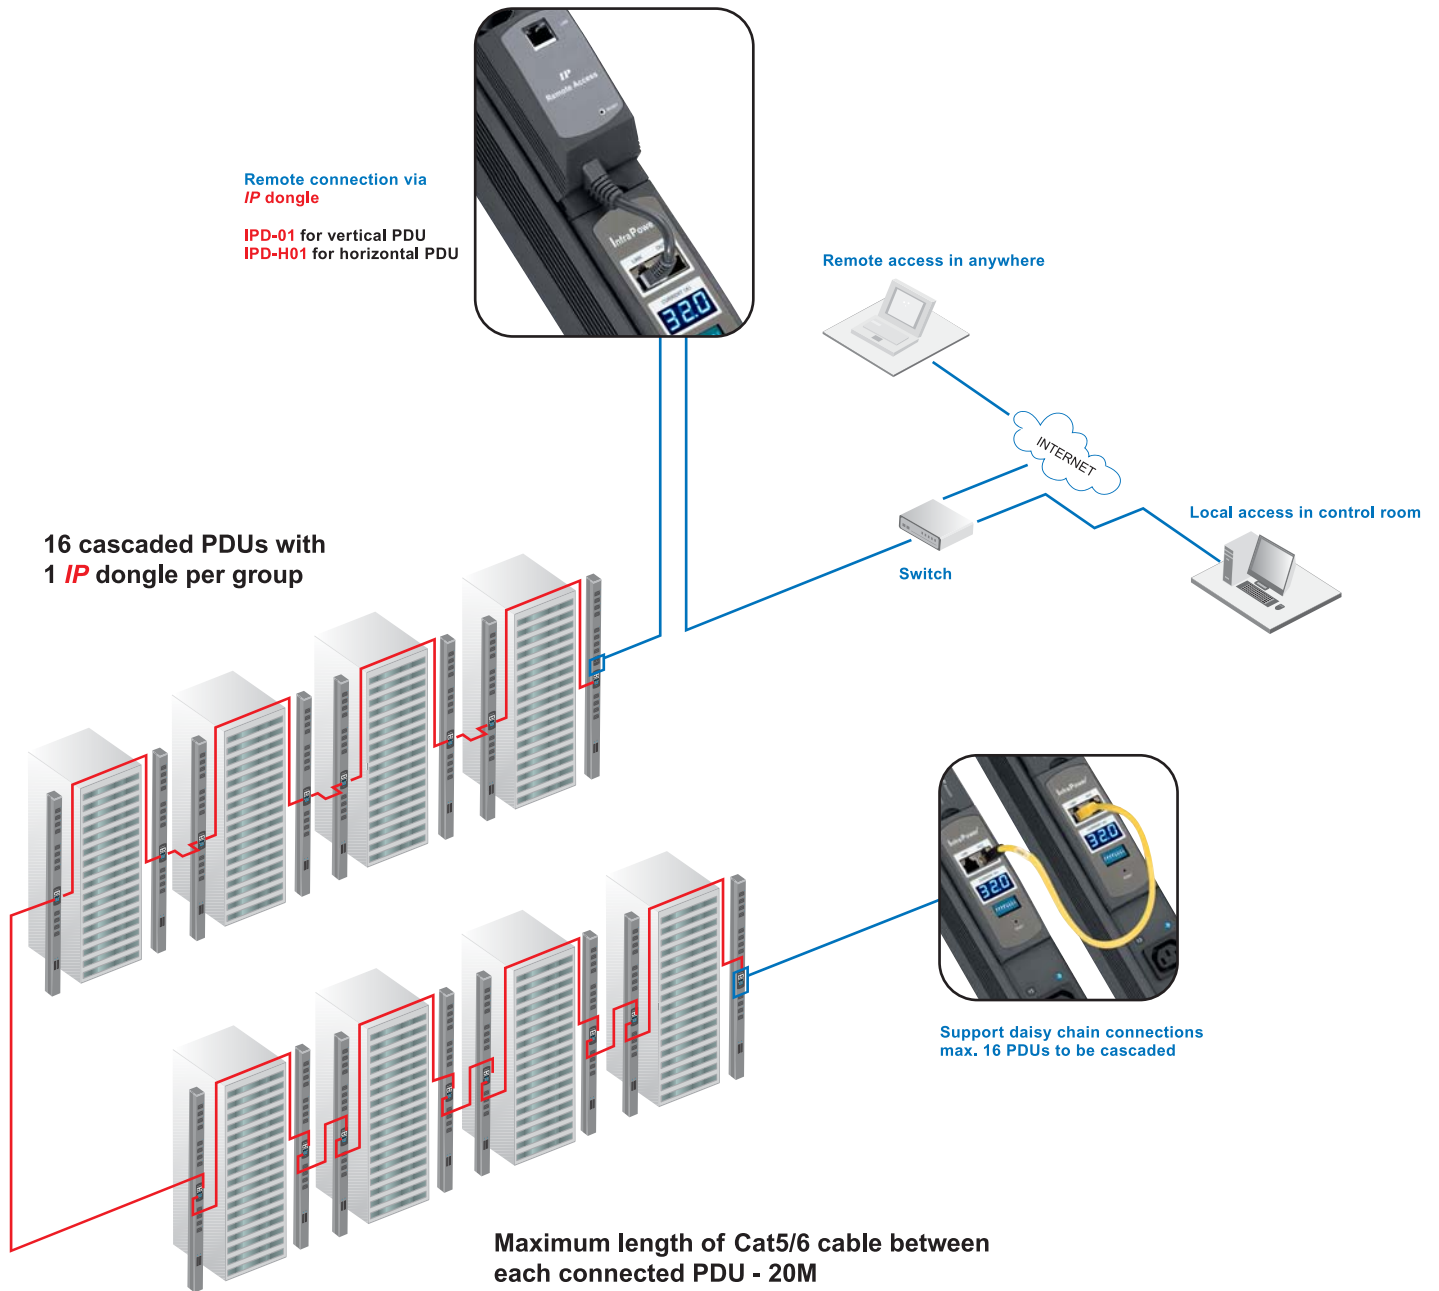


Using an IP dongle provides a highly cost effective method to access your switched and monitored PDU devices. The dongle is hot pluggable and can be supplied as an upgrade or retrofit component to the entire range of InfraPower PDU devices, this offers a true migration path for installed PDU devices that do not require IP or remote access from day one installation. InfraPower PDU solutions are designed to support daisy chain connections allowing up to 16 PDUs to be cascaded via Cat6 cables - all the PDUs are remotely accessed via a single network IP address.

The GUI management software ( **PPS-01** ) free downloaded allows the user to see real time data and provides remote control and monitoring of the installed PDUs over a TCP/IP Ethernet network.

The GUI software is simply accessed via a standard web browser and is capable of automatically discovering all the connected MTS switched and MT monitored PDUs. The software supports one central management interface for all connected PDUs providing information including current consumption, overload alarm threshold, PDU name and outlet level name.

# To Remotely Access and Configure your MTS / MT series PDU via Serial

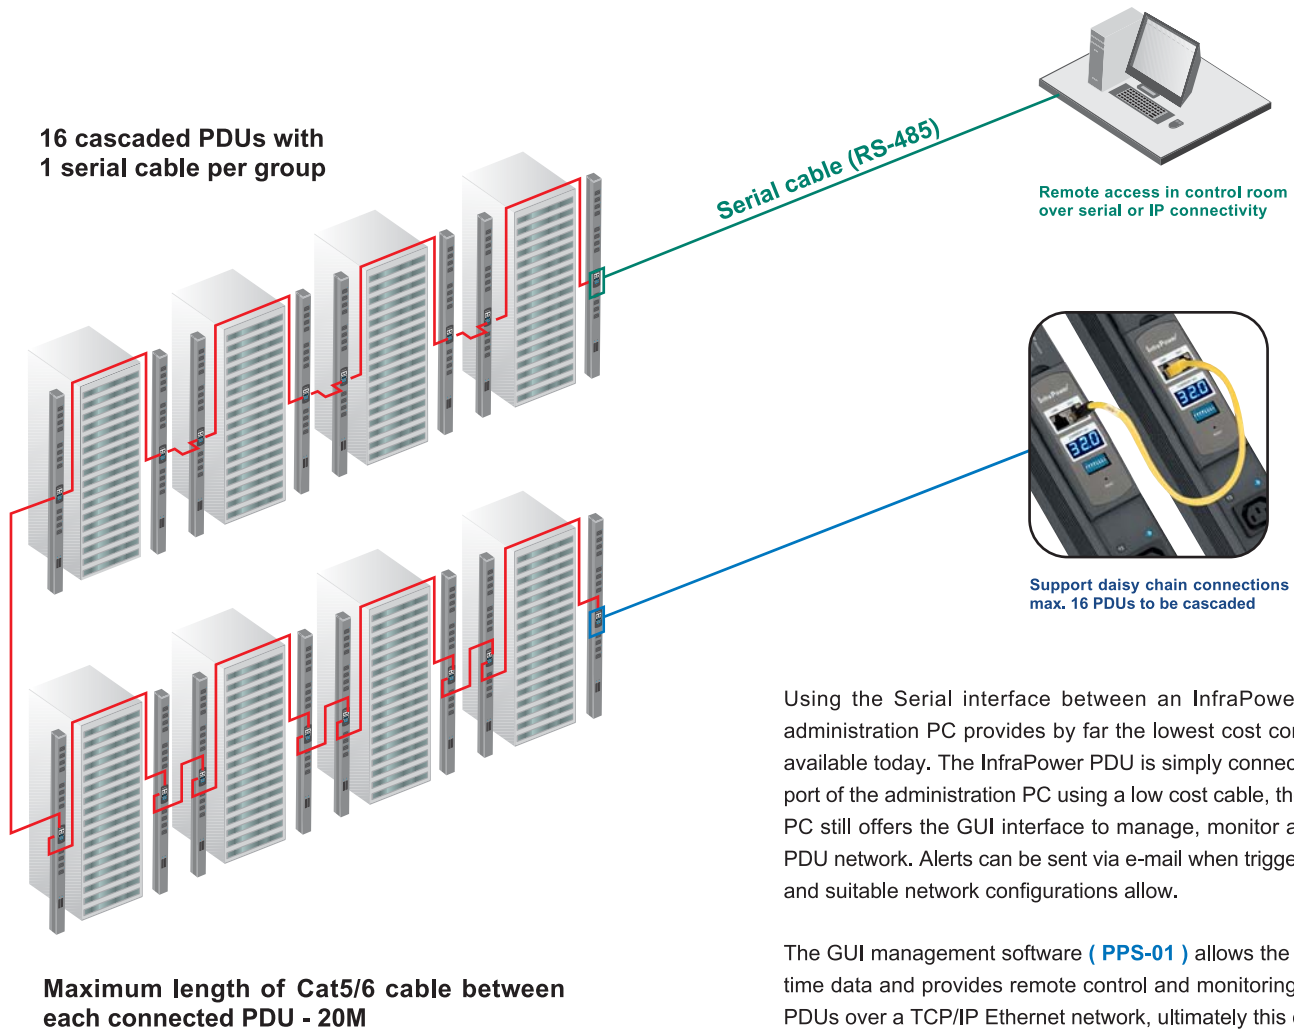

Using the Serial interface between an InfraPower PDU and an administration PC provides by far the lowest cost connectivity setup available today. The InfraPower PDU is simply connected to the serial port of the administration PC using a low cost cable, the administration PC still offers the GUI interface to manage, monitor and control your PDU network. Alerts can be sent via e-mail when triggered by set limits and suitable network configurations allow.

The GUI management software ( **PPS-01** ) allows the user to see real time data and provides remote control and monitoring of the installed PDUs over a TCP/IP Ethernet network, ultimately this can help reduce manpower and travel costs by negating the need for staff to actually be at the equipment location improving uptime and productivity.

## Web-Based GUI ( PPS-01 ) for IP Dongle & Serial Connection

PDU ID	Model	PDU Location	Status	Total	Circuit A	Circuit B	Load	Alerts	
01	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
02	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
03	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
04	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
05	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
06	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
07	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
08	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
09	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
10	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
11	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
12	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
13	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
14	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
15	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4
16	V16-8C20A-16T	New_Location	Normal	8.4	18.4	8.4	13.4	8.4	13.4

Outlet ID	Name	Status	Switch	Outlet ID	Name	Status	Switch
1	DeviceName_01	ON	OFF	12	DeviceName_12	OFF	ON
2	DeviceName_02	ON	OFF	14	DeviceName_14	OFF	ON
3	DeviceName_03	ON	OFF	16	DeviceName_16	OFF	ON
4	DeviceName_04	ON	OFF	18	DeviceName_18	OFF	ON
5	DeviceName_05	OFF	ON	17	DeviceName_17	OFF	ON
6	DeviceName_06	OFF	ON	18	DeviceName_18	OFF	ON
7	DeviceName_07	OFF	ON	18	DeviceName_18	OFF	ON
8	DeviceName_08	OFF	ON	20	DeviceName_20	OFF	ON
9	DeviceName_09	OFF	ON	21	DeviceName_21	OFF	ON
10	DeviceName_10	OFF	ON	22	DeviceName_22	OFF	ON
11	DeviceName_11	OFF	ON	23	DeviceName_23	OFF	ON
12	DeviceName_12	OFF	ON	24	DeviceName_24	OFF	ON

**Configuration**

IP Dongle Device:

Password:

Location:

Network setting:  DHCP,  Static

IP Address:

Subnet:

Gateway:

Port:

Serial No:

MAC Address:

Firmware Version:

### Monitoring

- Status of all connected PDUs
- Aggregate current on each PDU
- Latest loading on each circuit of PDU
- Alarm threshold setup
- Rename for PDU and location

### Switching

- On / off status of each outlet
- Remote on / off for individual outlet
- Rename for device name connected in each outlet
- Aggregate current on PDU

### Setup

- IP dongle configuration setting
- Password setting
- Network setting
- Hardware information provided






# InfraPower® Manager


InfraPower Manager is an add-on software tool to enhance the features and benefits of InfraPower by providing a centralized or remote management platform for the MTS switched and MT monitored PDUs. InfraPower Manager can be used in the IP dongle remote access. Building on the existing features of the Web-Based GUI (PPS-01 / IPS-01), InfraPower Manager provides total reporting with detailed logs and event occurrences, all stored or captured from a central management location.

## Centralized Management

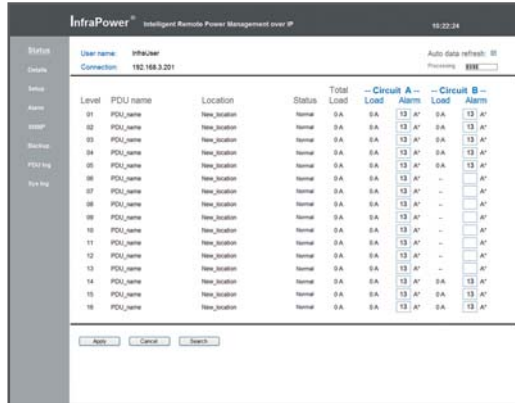


- One single interface for remote managing all PDUs in the cascade group
- Rename for PDU and location
- Alarm threshold setup for excessive outlet circuit

## Setup

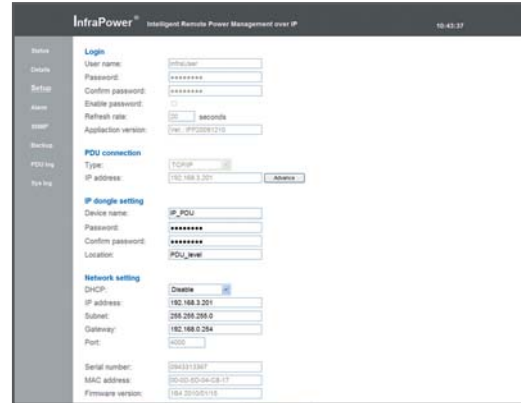


- IP dongle configuration and network setting
- IP remote access via password for application security
- PDU hardware information provided

## IP Remote Monitoring

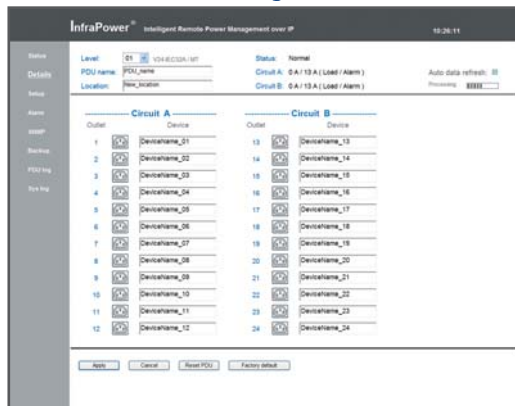


- Allows real time remote monitoring on PDUs
- Auto data refresh to ensure that the data is up-to-date
- Detects the connected MT PDUs automatically
- Provides latest loading on each circuit

## IP Remote Switching

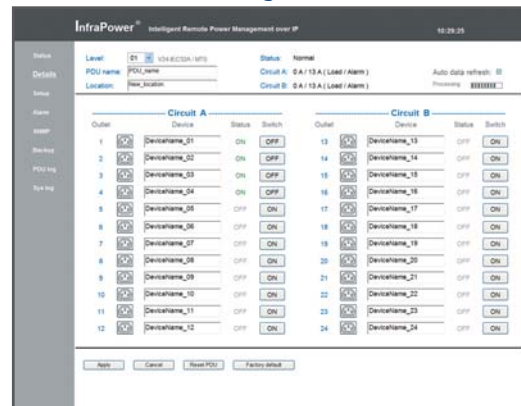


- Allows remote switch on / off for individual outlet socket
- Provides status of individual outlet ON / OFF
- Auto recognizing the MTS PDU model numbers
- Rename for device name connected in each outlet

## Reporting

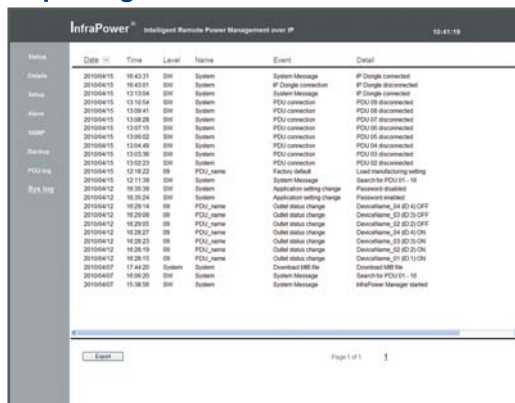

- Provides details report at each time set and total reporting with detailed logs / event occurrences

## Alert Email Setting

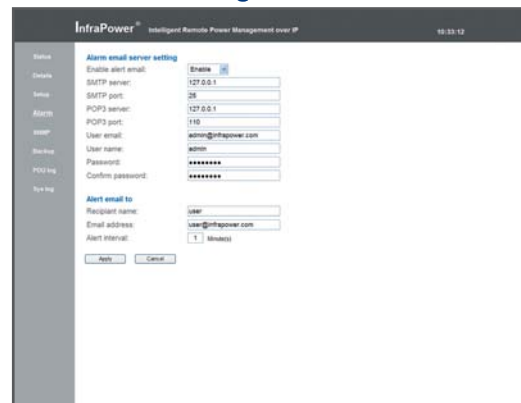

- Alert email address setting. Email notification will be sent to user when the status is alarming



The InfraPower MD Series metered PDU is a Rackmount industrial grade PDU for mission critical data centers. The MD PDU allows true RMS current monitoring via a simple, digital RMS ammeter. The blue LED display is easy to read from a distance and allows rapid access to the aggregate load on the circuit; this easily prevents circuit overloads during equipment installation and allows users to capacity plan based on actual real time power consumption. The MD PDU is available in vertical and horizontal form factors.



## Features & Benefits

- True RMS ammeter provides accurate local current measurement and helps avoiding current overload in high-density equipment environment
- Blue light on the RMS ammeter allows easy local reading on current
- Data center grade receptables designed for high reliability and fault-tolerance
- Variety of input and output sockets allows the flexibility to different power requirement
- Zero U (vertical) and rackmount (horizontal) form factors available
- Receptable option from 2 to 24
- 2 year warranty, upgradable to 5 year maintenance



**Metered PDU**  
Easy to read digital ammeter display



**RMS current meter**  
Prevent accidental overload during equipment installation



**Circuit breaker / Resettable fuse**  
Individual branch rated circuit breakers protect load segments to ensure increasing reliability. Circuit breakers with flat rockers are fully shrouded to prevent accidental on/off operation.

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, inch)
V24US-20A-MD	0 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 46.8
V24US-30A-MD	0 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 46.8
V20US-20A-MD	0 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 40.8
V20US-30A-MD	0 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 40.8
V16US-20A-MD	0 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 34.9
V16US-30A-MD	0 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 34.9
V12US-20A-MD	0 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 29
V12US-30A-MD	0 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 29
V8US-20A-MD	0 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 25.1
V8US-30A-MD	0 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 25.1
V24C13-30A-MD	0 U	24 outlets	(24) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V20C13-30A-MD	0 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V16C13-30A-MD	0 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
V12C13-30A-MD	0 U	12 outlets	(12) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 29
V8C13-30A-MD	0 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	2.2 x 2 x 25.1
V20C13/4C19-30A-MD	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V20C13/2C19-30A-MD	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 46.8
V16C13/4C19-30A-MD	0 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V16C13/2C19-30A-MD	0 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 40.8
V12C13/4C19-30A-MD	0 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
V12C13/2C19-30A-MD	0 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 34.9
V8C13/4C19-30A-MD	0 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 29
V8C13/2C19-30A-MD	0 U	10 outlets	(8) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 29
V4C13/4C19-30A-MD	0 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 25.1
V4C13/2C19-30A-MD	0 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	2.2 x 2 x 25.1
H24US-20A-MD	2 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H24US-30A-MD	2 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H20US-20A-MD	2 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H20US-30A-MD	2 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H16US-20A-MD	2 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H16US-30A-MD	2 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H12US-20A-MD	1 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H12US-30A-MD	1 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H10US-20A-MD	1 U	10 outlets	(10) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H10US-30A-MD	1 U	10 outlets	(10) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H8US-20A-MD	1 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H8US-30A-MD	1 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H6US-20A-MD	1 U	6 outlets	(6) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H6US-30A-MD	1 U	6 outlets	(6) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H5US-20A-MD	1 U	5 outlets	(5) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H5US-30A-MD	1 U	5 outlets	(5) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H4US-20A-MD	1 U	4 outlets	(4) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H4US-30A-MD	1 U	4 outlets	(4) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H24C13-30A-MD	2 U	24 outlets	(24) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H20C13-30A-MD	2 U	20 outlets	(20) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H16C13-30A-MD	2 U	16 outlets	(16) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H12C13-30A-MD	1 U	12 outlets	(12) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H10C13-30A-MD	1 U	10 outlets	(10) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H8C13-30A-MD	1 U	8 outlets	(8) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H6C13-30A-MD	1 U	6 outlets	(6) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H5C13-30A-MD	1 U	5 outlets	(5) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H4C13-30A-MD	1 U	4 outlets	(4) IEC320 C13	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H16C13/4C19-30A-MD	2 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H18C13/2C19-30A-MD	2 U	20 outlets	(18) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H12C13/4C19-30A-MD	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H14C13/2C19-30A-MD	2 U	16 outlets	(14) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 3.5
H4C13/4C19-30A-MD	1 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H6C13/2C19-30A-MD	1 U	8 outlets	(6) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H2C13/4C19-30A-MD	1 U	6 outlets	(2) IEC320 C13/ (4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H4C13/2C19-30A-MD	1 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H4C19-30A-MD	1 U	4 outlets	(4) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H2C13/2C19-30A-MD	1 U	4 outlets	(2) IEC320 C13/ (2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8
H2C19-30A-MD	1 U	2 outlets	(2) IEC320 C19	L6-30P	10 Feet	208V	30A	17.3 x 3.9 x 1.8

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24C13-16A-MD	0 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1187.5
V24C13-20A-MD	0 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1187.5
V24C13-32A-MD	0 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1187.5
V20C13-16A-MD	0 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1037.5
V20C13-20A-MD	0 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1037.5
V20C13-32A-MD	0 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1037.5
V16C13-16A-MD	0 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 887.5
V16C13-20A-MD	0 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 887.5
V16C13-32A-MD	0 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	55 x 50 x 887.5
V12C13-16A-MD	0 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 737.5
V12C13-20A-MD	0 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 737.5
V12C13-32A-MD	0 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	55 x 50 x 737.5
V8C13-16A-MD	0 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 637.5
V8C13-20A-MD	0 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 637.5
V8C13-32A-MD	0 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	55 x 50 x 637.5
V20C13/4C19-32A-MD	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V20C13/2C19-32A-MD	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V16C13/4C19-32A-MD	0 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V16C13/2C19-32A-MD	0 U	18 outlets	(16) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V12C13/4C19-32A-MD	0 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
V12C13/2C19-32A-MD	0 U	14 outlets	(12) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
V8C13/4C19-32A-MD	0 U	12 outlets	(8) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 737.5
V8C13/2C19-32A-MD	0 U	10 outlets	(8) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 737.5
V4C13/4C19-32A-MD	0 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 637.5
V4C13/2C19-32A-MD	0 U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 637.5
H24C13-16A-MD	2 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H24C13-20A-MD	2 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H24C13-32A-MD	2 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H20C13-16A-MD	2 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H20C13-20A-MD	2 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H20C13-32A-MD	2 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H16C13-16A-MD	2 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H16C13-20A-MD	2 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H16C13-32A-MD	2 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H12C13-16A-MD	1U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H12C13-20A-MD	1U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H12C13-32A-MD	1U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H10C13-16A-MD	1U	10 outlets	(10) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H10C13-20A-MD	1U	10 outlets	(10) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H10C13-32A-MD	1U	10 outlets	(10) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H8C13-16A-MD	1U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H8C13-20A-MD	1U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H8C13-32A-MD	1U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H6C13-16A-MD	1U	6 outlets	(6) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H6C13-20A-MD	1U	6 outlets	(6) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H6C13-32A-MD	1U	6 outlets	(6) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H5C13-16A-MD	1U	5 outlets	(5) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H5C13-20A-MD	1U	5 outlets	(5) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H5C13-32A-MD	1U	5 outlets	(5) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H4C13-16A-MD	1U	4 outlets	(4) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H4C13-20A-MD	1U	4 outlets	(4) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H4C13-32A-MD	1U	4 outlets	(4) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H16C13/4C19-32A-MD	2 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H18C13/2C19-32A-MD	2 U	20 outlets	(18) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H12C13/4C19-32A-MD	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H14C13/2C19-32A-MD	2 U	16 outlets	(14) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H4C13/4C19-32A-MD	1U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H6C13/2C19-32A-MD	1U	8 outlets	(6) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C13/4C19-32A-MD	1U	6 outlets	(2) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H4C13/2C19-32A-MD	1U	6 outlets	(4) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H4C19-32A-MD	1U	4 outlets	(4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C13/2C19-32A-MD	1U	4 outlets	(2) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C19-32A-MD	1U	2 outlets	(2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24UK-13A-MD	0 U	24 outlets	(24) BS1363	BS1363	3M	230V	13A	55 x 50 x 1750
V24UK-16A-MD	0 U	24 outlets	(24) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1750
V24UK-20A-MD	0 U	24 outlets	(24) BS1363	Open end	3M	230V	20A	55 x 50 x 1750
V24UK-32A-MD	0 U	24 outlets	(24) BS1363	60309	3M	230V	32A	55 x 50 x 1750
V20UK-13A-MD	0 U	20 outlets	(20) BS1363	BS1363	3M	230V	13A	55 x 50 x 1500
V20UK-16A-MD	0 U	20 outlets	(20) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1500
V20UK-20A-MD	0 U	20 outlets	(20) BS1363	Open end	3M	230V	20A	55 x 50 x 1500
V20UK-32A-MD	0 U	20 outlets	(20) BS1363	60309	3M	230V	32A	55 x 50 x 1500
V16UK-13A-MD	0 U	16 outlets	(16) BS1363	BS1363	3M	230V	13A	55 x 50 x 1187.5
V16UK-16A-MD	0 U	16 outlets	(16) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 1187.5
V16UK-20A-MD	0 U	16 outlets	(16) BS1363	Open end	3M	230V	20A	55 x 50 x 1187.5
V16UK-32A-MD	0 U	16 outlets	(16) BS1363	60309	3M	230V	32A	55 x 50 x 1187.5
V12UK-13A-MD	0 U	12 outlets	(12) BS1363	BS1363	3M	230V	13A	55 x 50 x 887.5
V12UK-16A-MD	0 U	12 outlets	(12) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 887.5
V12UK-20A-MD	0 U	12 outlets	(12) BS1363	Open end	3M	230V	20A	55 x 50 x 887.5
V12UK-32A-MD	0 U	12 outlets	(12) BS1363	60309	3M	230V	32A	55 x 50 x 887.5
V8UK-13A-MD	0 U	8 outlets	(8) BS1363	BS1363	3M	230V	13A	55 x 50 x 637.5
V8UK-16A-MD	0 U	8 outlets	(8) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 637.5
V8UK-20A-MD	0 U	8 outlets	(8) BS1363	Open end	3M	230V	20A	55 x 50 x 637.5
V8UK-32A-MD	0 U	8 outlets	(8) BS1363	60309	3M	230V	32A	55 x 50 x 637.5
V12UK/8C13/4C19-32A-MD	0 U	24 outlets	(12) BS1363 / (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V10UK/8C13/4C19-32A-MD	0 U	22 outlets	(10) BS1363 / (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V8UK/8C13/4C19-32A-MD	0 U	20 outlets	(8) BS1363 / (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1337.5
V8UK/8C13/2C19-32A-MD	0 U	18 outlets	(8) BS1363 / (8) IEC320 C13 / (2) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1187.5
V6UK/8C13/2C19-32A-MD	0 U	16 outlets	(6) BS1363 / (8) IEC320 C13 / (2) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1187.5
H7UK-13A-MD	1 U	7 outlets	(7) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H7UK-16A-MD	1 U	7 outlets	(7) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H7UK-20A-MD	1 U	7 outlets	(7) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H6UK-13A-MD	1 U	6 outlets	(6) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H6UK-16A-MD	1 U	6 outlets	(6) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H6UK-20A-MD	1 U	6 outlets	(6) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H5UK-13A-MD	1 U	5 outlets	(5) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H5UK-16A-MD	1 U	5 outlets	(5) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H5UK-20A-MD	1 U	5 outlets	(5) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H4UK-13A-MD	1 U	4 outlets	(4) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H4UK-16A-MD	1 U	4 outlets	(4) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H4UK-20A-MD	1 U	4 outlets	(4) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H4UK-32A-MD	1 U	4 outlets	(4) BS1363	60309	3M	230V	32A	440 x 65 x 45
V20SCH-16A-MD	0 U	20 outlets	(20) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1337.5
V20SCH-20A-MD	0 U	20 outlets	(20) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1337.5
V20SCH-32A-MD	0 U	20 outlets	(20) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1337.5
V16SCH-16A-MD	0 U	16 outlets	(16) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1037.5
V16SCH-20A-MD	0 U	16 outlets	(16) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1037.5
V16SCH-32A-MD	0 U	16 outlets	(16) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1037.5
V12SCH-16A-MD	0 U	12 outlets	(12) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 887.5
V12SCH-20A-MD	0 U	12 outlets	(12) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 887.5
V12SCH-32A-MD	0 U	12 outlets	(12) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 887.5
V8SCH-16A-MD	0 U	8 outlets	(8) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 637.5
V8SCH-20A-MD	0 U	8 outlets	(8) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 637.5
V8SCH-32A-MD	0 U	8 outlets	(8) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 637.5
H7SCH-16A-MD	1 U	7 outlets	(7) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H7SCH-20A-MD	1 U	7 outlets	(7) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H6SCH-16A-MD	1 U	6 outlets	(6) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H6SCH-20A-MD	1 U	6 outlets	(6) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H5SCH-16A-MD	1 U	5 outlets	(5) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H5SCH-20A-MD	1 U	5 outlets	(5) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H4SCH-16A-MD	1 U	4 outlets	(4) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H4SCH-20A-MD	1 U	4 outlets	(4) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45

# InfraPower® S - Standard Series



The InfraPower Standard Series PDU is a Rackmount industrial grade PDU for cost effective, reliable power distribution. The Standard series is available in 20 and 30amp variants and in vertical and horizontal form factors.



## Features & Benefits

- Zero U (vertical) and rackmount (horizontal) form factors
- 20 Amp and 30 Amp options
- LED indicators for power
- Receptable option from 4 to 24
- 2 year warranty, upgradable to 5 year maintenance



## Specifications

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, inch)
V24US-20A	0 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 46.8
V24US-30A	0 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 46.8
V20US-20A	0 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 40.8
V20US-30A	0 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 40.8
V16US-20A	0 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 34.9
V16US-30A	0 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 34.9
V12US-20A	0 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 29
V12US-30A	0 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 29
V8US-20A	0 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	2.2 x 2 x 25.1
V8US-30A	0 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	2.2 x 2 x 25.1
H24US-20A	2 U	24 outlets	(24) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H24US-30A	2 U	24 outlets	(24) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H20US-20A	2 U	20 outlets	(20) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H20US-30A	2 U	20 outlets	(20) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H16US-20A	2 U	16 outlets	(16) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 3.5
H16US-30A	2 U	16 outlets	(16) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 3.5
H12US-20A	1 U	12 outlets	(12) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H12US-30A	1 U	12 outlets	(12) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H10US-20A	1 U	10 outlets	(10) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H10US-30A	1 U	10 outlets	(10) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H8US-20A	1 U	8 outlets	(8) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H8US-30A	1 U	8 outlets	(8) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H6US-20A	1 U	6 outlets	(6) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H6US-30A	1 U	6 outlets	(6) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H5US-20A	1 U	5 outlets	(5) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H5US-30A	1 U	5 outlets	(5) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8
H4US-20A	1 U	4 outlets	(4) 5-20R	5-20P	10 Feet	110V	20A	17.3 x 3.9 x 1.8
H4US-30A	1 U	4 outlets	(4) 5-20R	5-30P	10 Feet	110V	30A	17.3 x 3.9 x 1.8



Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24C13-16A	0 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1187.5
V24C13-20A	0 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1187.5
V24C13-32A	0 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1187.5
V20C13-16A	0 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 1037.5
V20C13-20A	0 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 1037.5
V20C13-32A	0 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	55 x 50 x 1037.5
V16C13-16A	0 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 887.5
V16C13-20A	0 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 887.5
V16C13-32A	0 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	55 x 50 x 887.5
V12C13-16A	0 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 737.5
V12C13-20A	0 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 737.5
V12C13-32A	0 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	55 x 50 x 737.5
V8C13-16A	0 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	55 x 50 x 637.5
V8C13-20A	0 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	55 x 50 x 637.5
V8C13-32A	0 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	55 x 50 x 637.5
V20C13/4C19-32A	0 U	24 outlets	(20) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V20C13/2C19-32A	0 U	22 outlets	(20) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1187.5
V16C13/4C19-32A	0 U	20 outlets	(16) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V16C13/2C19-32A	0 U	18 outlets	(16) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 1037.5
V12C13/4C19-32A	0 U	16 outlets	(12) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
V12C13/2C19-32A	0 U	14 outlets	(12) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 887.5
V8C13/4C19-32A	0 U	12 outlets	(8) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 737.5
V8C13/2C19-32A	0 U	10 outlets	(8) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 737.5
V4C13/4C19-32A	0 U	8 outlets	(4) IEC320 C13 / (4) IEC320 C19	60309	3M	220V	32A	55 x 50 x 637.5
V4C13/2C19-32A	0 U	6 outlets	(4) IEC320 C13 / (2) IEC320 C19	60309	3M	220V	32A	55 x 50 x 637.5
H24C13-16A	2 U	24 outlets	(24) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H24C13-20A	2 U	24 outlets	(24) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H24C13-32A	2 U	24 outlets	(24) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H20C13-16A	2 U	20 outlets	(20) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H20C13-20A	2 U	20 outlets	(20) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H20C13-32A	2 U	20 outlets	(20) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H16C13-16A	2 U	16 outlets	(16) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 89
H16C13-20A	2 U	16 outlets	(16) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 89
H16C13-32A	2 U	16 outlets	(16) IEC320 C13	60309	3M	220V	32A	440 x 100 x 89
H12C13-16A	1 U	12 outlets	(12) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H12C13-20A	1 U	12 outlets	(12) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H12C13-32A	1 U	12 outlets	(12) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H10C13-16A	1 U	10 outlets	(10) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H10C13-20A	1 U	10 outlets	(10) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H10C13-32A	1 U	10 outlets	(10) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H8C13-16A	1 U	8 outlets	(8) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H8C13-20A	1 U	8 outlets	(8) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H8C13-32A	1 U	8 outlets	(8) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H6C13-16A	1 U	6 outlets	(6) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H6C13-20A	1 U	6 outlets	(6) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H6C13-32A	1 U	6 outlets	(6) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H5C13-16A	1 U	5 outlets	(5) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H5C13-20A	1 U	5 outlets	(5) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H5C13-32A	1 U	5 outlets	(5) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H4C13-16A	1 U	4 outlets	(4) IEC320 C13	60309 / C20	3M	220V	16A	440 x 100 x 45
H4C13-20A	1 U	4 outlets	(4) IEC320 C13	Open end	3M	220V	20A	440 x 100 x 45
H4C13-32A	1 U	4 outlets	(4) IEC320 C13	60309	3M	220V	32A	440 x 100 x 45
H22C13/2C19-32A	2 U	24 outlets	(22) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H16C13/4C19-32A	2 U	20 outlets	(16) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H18C13/2C19-32A	2 U	20 outlets	(18) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H12C13/4C19-32A	2 U	16 outlets	(12) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H14C13/2C19-32A	2 U	16 outlets	(14) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 89
H6C13/4C19-32A	1 U	10 outlets	(6) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H4C13/4C19-32A	1 U	8 outlets	(4) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C13/4C19-32A	1 U	6 outlets	(2) IEC320 C13/ (4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H4C19-32A	1 U	4 outlets	(4) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C13/2C19-32A	1 U	4 outlets	(2) IEC320 C13/ (2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45
H2C19-32A	1 U	2 outlets	(2) IEC320 C19	60309	3M	220V	32A	440 x 100 x 45

Model	Rack Space	Outlet Quantity	Outlet Types	Input Plug	Cord	Voltage	Amp	Dimensions (W x D x H, mm)
V24UK-20A	0 U	24 outlets	(24) BS1363	Open end	3M	230V	20A	55 x 50 x 1750
V24UK-32A	0 U	24 outlets	(24) BS1363	60309	3M	230V	32A	55 x 50 x 1750
V20UK-20A	0 U	20 outlets	(20) BS1363	Open end	3M	230V	20A	55 x 50 x 1500
V20UK-32A	0 U	20 outlets	(20) BS1363	60309	3M	230V	32A	55 x 50 x 1500
V16UK-13A	0 U	16 outlets	(16) BS1363	BS1363	3M	230V	13A	55 x 50 x 1187.5
V16UK-16A	0 U	16 outlets	(16) BS1363	BS1363	3M	230V	16A	55 x 50 x 1187.5
V16UK-20A	0 U	16 outlets	(16) BS1363	Open end	3M	230V	20A	55 x 50 x 1187.5
V16UK-32A	0 U	16 outlets	(16) BS1363	60309	3M	230V	32A	55 x 50 x 1187.5
V12UK-13A	0 U	12 outlets	(12) BS1363	BS1363	3M	230V	13A	55 x 50 x 887.5
V12UK-16A	0 U	12 outlets	(12) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 887.5
V12UK-20A	0 U	12 outlets	(12) BS1363	Open end	3M	230V	20A	55 x 50 x 887.5
V12UK-32A	0 U	12 outlets	(12) BS1363	60309	3M	230V	32A	55 x 50 x 887.5
V8UK-13A	0 U	8 outlets	(8) BS1363	BS1363	3M	230V	13A	55 x 50 x 637.5
V8UK-16A	0 U	8 outlets	(8) BS1363	60309 / C20	3M	230V	16A	55 x 50 x 637.5
V8UK-20A	0 U	8 outlets	(8) BS1363	Open end	3M	230V	20A	55 x 50 x 637.5
V8UK-32A	0 U	8 outlets	(8) BS1363	60309	3M	230V	32A	55 x 50 x 637.5
V12UK/8C13/4C19-32A	0 U	24 outlets	(12) BS1363 / (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V10UK/8C13/4C19-32A	0 U	22 outlets	(10) BS1363 / (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1500
V8UK/8C13/4C19-32A	0 U	20 outlets	(8) BS1363/ (8) IEC320 C13 / (4) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1337.5
V8UK/8C13/2C19-32A	0 U	18 outlets	(8) BS1363/ (8) IEC320 C13 / (2) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1187.5
V6UK/8C13/2C19-32A	0 U	16 outlets	(6) BS1363/ (8) IEC320 C13 / (2) IEC320 C19	60309	3M	230V	32A	55 x 50 x 1187.5
H8UK-13A	1 U	8 outlets	(8) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H8UK-16A	1 U	8 outlets	(8) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H8UK-20A	1 U	8 outlets	(8) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H7UK-13A	1 U	7 outlets	(7) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H7UK-16A	1 U	7 outlets	(7) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H7UK-20A	1 U	7 outlets	(7) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H6UK-13A	1 U	6 outlets	(6) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H6UK-16A	1 U	6 outlets	(6) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H6UK-20A	1 U	6 outlets	(6) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H5UK-13A	1 U	5 outlets	(5) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H5UK-16A	1 U	5 outlets	(5) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H5UK-20A	1 U	5 outlets	(5) BS1363	Open end	3M	230V	20A	440 x 65 x 45
H4UK-13A	1 U	4 outlets	(4) BS1363	BS1363	3M	230V	13A	440 x 65 x 45
H4UK-16A	1 U	4 outlets	(4) BS1363	60309 / C20	3M	230V	16A	440 x 65 x 45
H4UK-20A	1 U	4 outlets	(4) BS1363	Open end	3M	230V	20A	440 x 65 x 45
V20SCH-16A	0 U	20 outlets	(20) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1337.5
V20SCH-20A	0 U	20 outlets	(20) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1337.5
V20SCH-32A	0 U	20 outlets	(20) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1337.5
V16SCH-16A	0 U	16 outlets	(16) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 1037.5
V16SCH-20A	0 U	16 outlets	(16) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 1037.5
V16SCH-32A	0 U	16 outlets	(16) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 1037.5
V12SCH-16A	0 U	12 outlets	(12) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 887.5
V12SCH-20A	0 U	12 outlets	(12) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 887.5
V12SCH-32A	0 U	12 outlets	(12) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 887.5
V8SCH-16A	0 U	8 outlets	(8) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	55 x 65 x 637.5
V8SCH-20A	0 U	8 outlets	(8) CEE 7 Schuko	Open end	3M	220V	20A	55 x 65 x 637.5
V8SCH-32A	0 U	8 outlets	(8) CEE 7 Schuko	60309	3M	220V	32A	55 x 65 x 637.5
H8SCH-16A	1 U	8 outlets	(8) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H8SCH-20A	1 U	8 outlets	(8) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H7SCH-16A	1 U	7 outlets	(7) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H7SCH-20A	1 U	7 outlets	(7) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H6SCH-16A	1 U	6 outlet	(6) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H6SCH-20A	1 U	6 outlet	(6) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H5SCH-16A	1 U	5 outlets	(5) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H5SCH-20A	1 U	5 outlets	(5) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45
H4SCH-16A	1 U	4 outlets	(4) CEE 7 Schuko	Schuko / 60309 / C20	3M	220V	16A	440 x 65 x 45
H4SCH-20A	1 U	4 outlets	(4) CEE 7 Schuko	Open end	3M	220V	20A	440 x 65 x 45




# Outlets & Input Plugs

## PDU Outlets




## Power Plugs


### US

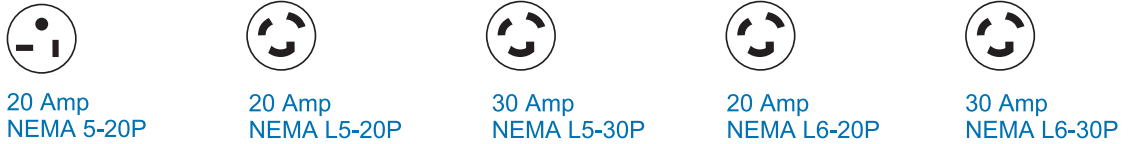


### IEC

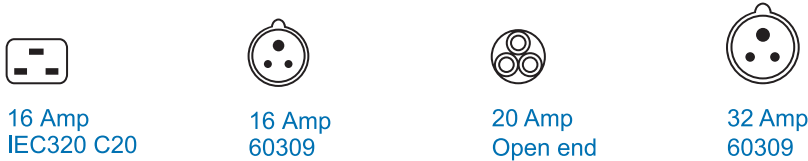

### UK

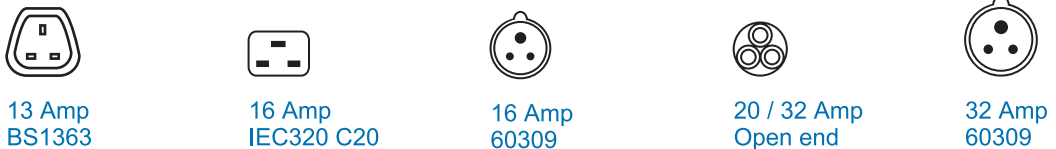

### GR

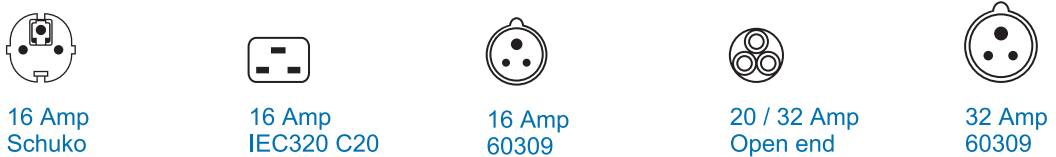

## Optional Accessories



**IPD-01**  
IP dongle for MTS & MT vertical PDU



**IPD-H01**  
IP dongle for MTS & MT horizontal PDU



**F-16A / 20A / 30A / 32A**  
Resettable fuse



**CR-16A / 20A / 30A / 32A**  
Circuit breaker with protection cover for vertical PDU

## Mounting Types



**VMS**  
Vertical button mounting




**VMB**  
Vertical bracket mounting



Horizontal rack mounting

# InfraPower® Series Selection Chart

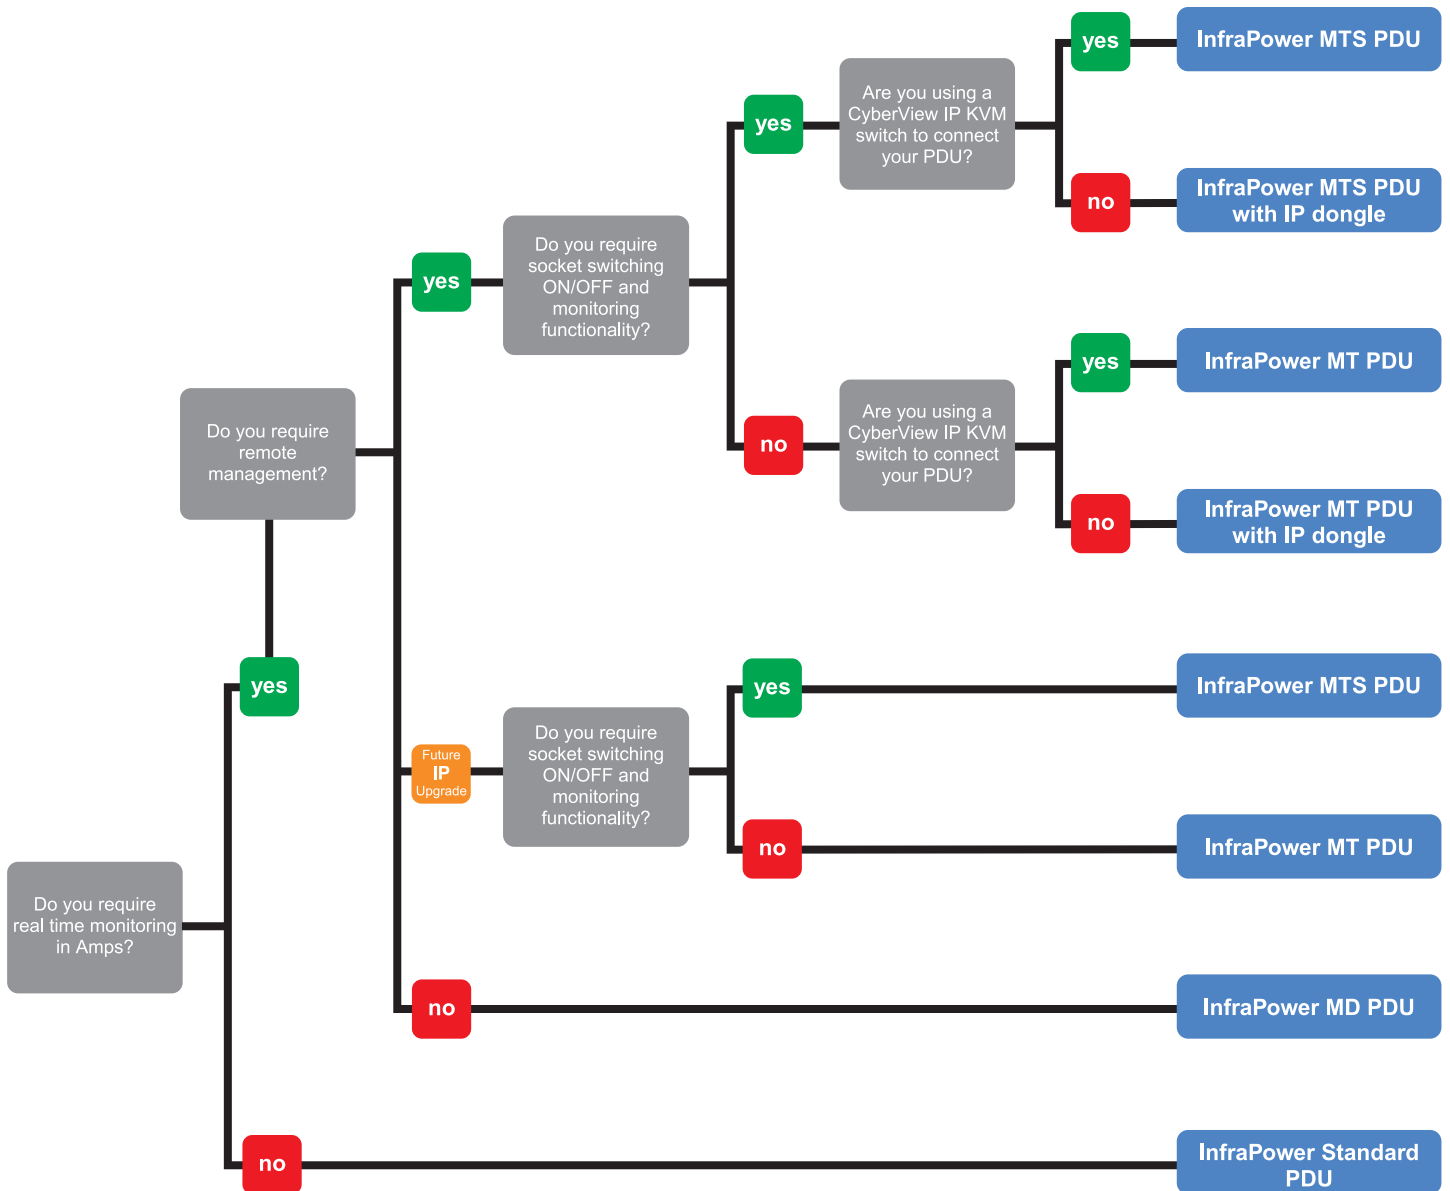

**Note:**

- The IP Dongle is a hot pluggable upgrade component on the MTS/MT PDU; this does not need to be purchased with the PDU and can be added as a future IP Upgrade as shown above




**MTS**  
Switched series



**MT**  
Monitored series



**MD**  
Metered series



**S**  
Standard series



Founded in 1995, **Austin Hughes Electronics Ltd** is a design and manufacturing group that offers a broad range of solutions based around 19 inch rack mount technology. These solutions include InfraSolution remote access control and locking, InfraPower intelligent remote management power solutions, CyberView LCD Keyboard and KVM drawers & InfraCool intelligent remote cooling system.

**Austin Hughes** has ISO14001 and ISO9001 approved design, manufacturing, assembly and test facilities in Hong Kong and China. Austin Hughes supports a worldwide customer base, through its global locations in Europe the United States and Japan, and through its extensive authorized channel partner support network.

**US****Austin Hughes Solutions Inc.**

39611 Eureka Drive, Newark  
California 94560  
USA

**Tel:** (1) 510 659 8888

**Email:** sales@infra-power.com

**Europe****Austin Hughes Europe Ltd.**

Unit 1, Chancery Gate Business Centre  
Manor House Avenue  
Southampton, SO15 0AE  
United Kingdom

**Tel:** +44 (0) 1794 521810

**Email:** info@austin-hughes.eu

**South Africa****Austin Hughes SA****HK****Austin Hughes Electronics Ltd.**

Unit 3708-3712, Cable TV Tower  
9 Hoi Shing Road, Tsuen Wan  
Hong Kong

**Tel:** (852) 2415 2121

**Email:** sales@infra-power.com

**China****Austin Hughes Electronics (China) Ltd.**

Hexi Road No.2, Jinxia Industrial Area  
Changan Town, Dongguan City  
Guangdong Province 523850  
China

**Middle East****Austin Hughes Middle East**

P.O. Box 43425

Dubai

United Arab Emirates

**Tel:** (971) 50 4532127

**Email:** info@austin-hughes.eu



**Austin Hughes** has an extensive distribution network, including Europe, the United States, the Middle East, Africa and Asia Pacific  
Contact your nearest sales office for details of local representation

**[www.austin-hughes.com](http://www.austin-hughes.com)**

Please ask for details of other products from Austin Hughes. Every effort has been made to ensure that the information contained herein is correct. The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2010 Austin Hughes Electronics Ltd. All rights reserved.

**Distributed by:**

**Distributor by country on application**

InfraPower-C10