

# EBC-3100 Mini-ITX Chassis for High Power Consumption Applications




## Features

- Designed for high performance applications, bundled with 270W high efficiency ATX power supply
- Front accessible I/O design
- Supports one expansion slot
- One 3.5" hard drive, one slim type optical drive capacity

## Specifications

<b>Model Name</b>		<b>EBC-3100</b>
<b>Platform</b>		Case only
<b>Chassis</b>	<b>Color</b>	Black
	<b>Dimensions (WxDxH) (mm)</b>	260 x 250 x 156
	<b>System Fan (WxDxH) (mm)</b>	80 x 80 x 25
	<b>Chassis Construction</b>	Heavy duty metal with plastic front panel
<b>Motherboard</b>	<b>Motherboard Model</b>	Refer to KINO Series
	<b>SBC Size (mm)</b>	Mini-ITX (170 x 170)
<b>Storage</b>	<b>Hard Drive</b>	1 x 3.5" SATA HDD space
	<b>ODD</b>	1 x 5.25" slim type
<b>Expansions</b>		1 x Full-height expansion slot Max. dimensions: 220 mm (L) x 27 mm (D)
<b>Power</b>	<b>Power Input</b>	90 V~264 V AC
	<b>Power Model</b>	ACE-A618C 180W, ACE-A627A 270W
<b>Reliability</b>	<b>Mounting</b>	Desktop, wall mount
	<b>Operating Temperature</b>	0°C ~ 50°C
	<b>Weight (Net/Gross)</b>	2.5 kg/3.9 kg

## Dimensions (Unit: mm)

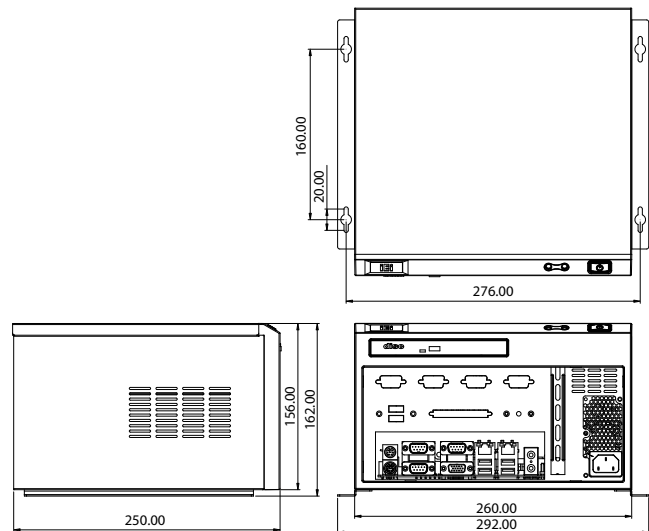

## Compatible SBC

Part No.	Expansion Type	Recommended CPU Cooler
KINO-AQ170	1 x PCIe x16	CF-115XA-R10, CF-115XC-R10, CF-115XD-R10
KINO-ABT	1 x PCIe x4	Fanless
KINO-AA750-i2	1 x PCIe x8	CF-989B-RS
KINO-AQ870	1 x PCIe x4	CF-1150SC-RS
KINO-AQ670	1 x PCIe x16	CF-115XA-R10, CF-115XC-R10, CF-115XD-R10
KINO-AH611	1 x PCIe x16	CF-115XA-R10, CF-115XC-R10, CF-115XD-R10
KINO-AH612	1 x PCIe x4	CF-115XA-R10, CF-115XC-R10, CF-115XD-R10

## Ordering Information

Part No.	Description
EBC-3100-R12/ACE-A618C	Mini-ITX embedded chassis, one 3.5" hard drive bay, with ACE-A618C-RS 180W ATX power supply, black
EBC-3100-R12/ACE-A630C	Mini-ITX embedded chassis, one 3.5" hard drive bay, with ACE-A630C-RS 300W ATX power supply, black

## Packing List

1 x System Fan	1 x Screw set	1 x QIG
1 x Power cord	1 x Wall mount kit	1 x SATA slim ODD cable

		1U AC Input							
Products	Model No.	Watt AT/ATX PFC	Input Voltage	Output Current Range					Efficiency
				+3.3 V	+5 V	+12 V	-12 V	+5 Vsb	
	ACE-A630C	300W ATX	90~265 VAC	16A (0.5A min.)	18A (0.5A min.)	15A (0.5A min.)	0.5A	3A	82%
	ACE-A618C	180W ATX	90~264 VAC	10A (0.1A min.)	14A (0.2A min.)	10A (0.6A min.)	0.3A	2.5A	85%